C310a

14A005

Restraints control module (14B321)

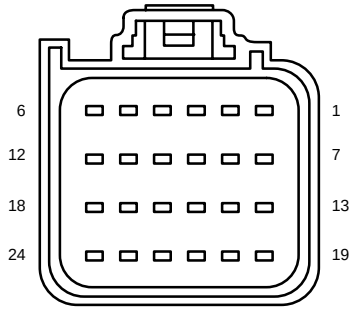

F24023

Pin	Circuit	Circuit function
1	30S-JA8 (RD/OG)	Driver air bag, feed 1
2	31S-JA8 (BK/OG)	Driver air bag, return 1
3	30S-JA11 (RD/WH)	Passenger air bag, feed 1
4	31S-JA11 (BK/WH)	Passenger air bag, return 1
5	30S-JA48 (RD/GN)	Driver air bag, feed 2
6	31S-JA48 (BK/GN)	Driver air bag, return 2
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	4-EE1 (GY/RD)	ISO Bus
12	15-JA10A (GN/OG)	Voltage supplied in Start and Run (overload protected)

Pin	Circuit	Circuit function
13	30S-JA32 (RD/YE)	Passenger air bag, feed 2
14	31S-JA32 (BK/YE)	Passenger air bag, return 2
15	–	not used
16	31-JA10 (BK/RD)	Ground
17	8-RJ10 (WH/BU)	Blue, signal
18	–	not used
19	31S-JA14 (BK/GN)	Air bag indicator, control
20	–	not used
21	–	not used
22	8-GE52 (WH/BK)	Air bag/safety belt status tone control
23	–	not used
24	–	not used