Power window switch, driver

Schematic

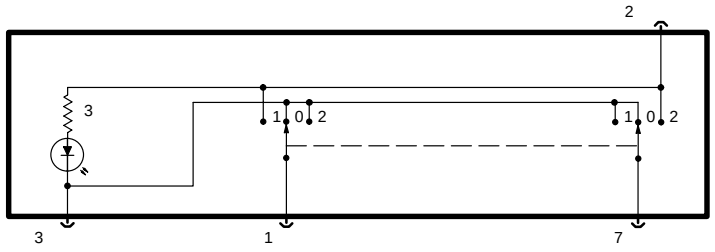

N309
Window operating switch, driver side front
0) Off
1) Up
2) Down
3) Illumination

N310
Window operating switch, driver side for passenger side
0) Neutral
1) Passenger's window up
2) Passenger's window down
3) Illumination

Terminal locations

C74
N309

C2125
N310

F07047



Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Window regulator circuit	2 and 1	Off	Open circuit
		Up	Closed circuit
		Down	Open circuit
	2 and 7	Off	Open circuit
		Up	Open circuit
		Down	Closed circuit
	3 and 1	Off	Closed circuit
		Up	Open circuit
		Down	Closed circuit
	3 and 7	Off	Closed circuit
		Up	Closed circuit
		Down	Open circuit