# Component Testing – Liftgate door lock switch

**700-09-00-16**
**2001**
**Escape**

**Schematic**

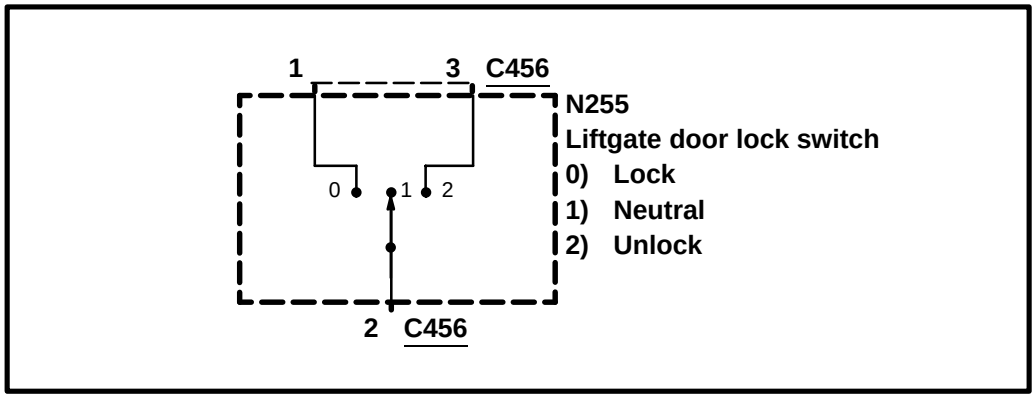


**Terminals**

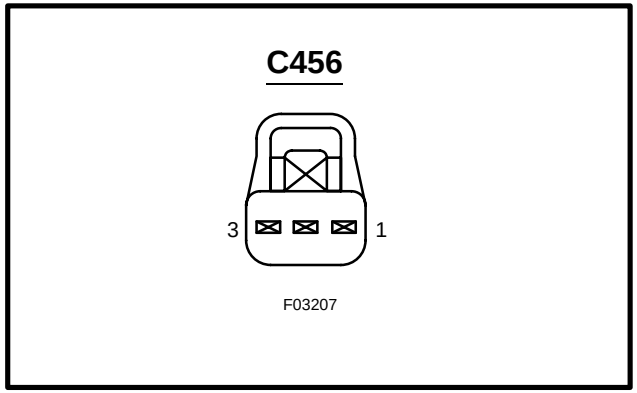


**Component testing procedure**

| Circuit to test | Connect self–powered test light or ohmmeter to terminals | Move switch to these positions | A good switch will indicate |
|---|---|---|---|
| Door lock switch | 2 and 1 | Lock | Closed circuit |
| | | Unlock | Open circuit |
| | | Neutral | Open circuit |
| | 2 and 3 | Lock | Open circuit |
| | | Unlock | Closed circuit |
| | | Neutral | Open circuit |