C1168

12A581

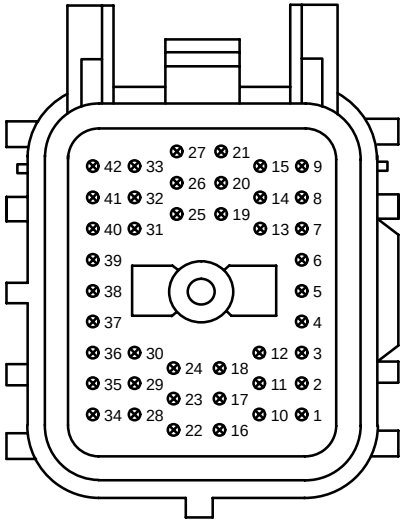

F42001

(1)	35 (TN/YE)	(12)	1087 (OG)	(23)		(33)	796 (LB)
(2)	555 (TN)	(13)	1086 (VT/OG)	(24)	361 (RD)	(34)	
(3)	556 (WH)	(14)	1291 (RD/YE)	(25)	552 (YE/RD)	(35)	16 (YE/WH)
(4)	561 (TN/RD)	(15)	48	(26)		(36)	904 (LG/RD)
(5)	557 (BN/YE)	(16)		(27)		(37)	1280 (GY/RD)
(6)	558 (BN/LB)	(17)	354 (LG/RD)	(28)		(38)	
(7)	559 (TN/BK)	(18)		(29)	676 (PK/OG)	(39)	795 (DG)
(8)	560 (LG/OG)	(19)	359 (GY/RD)	(30)	31 (WH/RD)	(40)	795 (DG)
(9)		(20)		(31)	39 (RD/WH)	(41)	1277 (WH/LG)
(10)	562 (LB)	(21)	351 (BN/WH)	(32)	48	(42)	
(11)	878 (PK/YE)	(22)	812 (DB/LG)				

C1171

13K027

K370
Daytime Running Lamps (DRL) relay 1



F05123

Pin	Circuit	Circuit function
30	13 (RD/BK)	Power, Hot with Low Beams on
85	196 (DB/OG)	Voltage supplied at all times (overload protected)
86	57 (BK)	Ground
87	471 (OG/LG)	Daytime running lamps resistor, to, Headlamp relay
87A	1033 (RD/YE)	Daytime Running Lamps (DRL) relay, Relay, switched power

C1172

13K027

K371
Daytime Running Lamps (DRL) relay 2



F05109

Pin	Circuit	Circuit function
1	15 (RD/YE)	Power, Hot with Headlamps on
2	57 (BK)	Ground
3	295 (LB/PK)	Voltage in Run (overload protected)
4	196 (DB/OG)	Voltage supplied at all times (overload protected)
5	–	not used