Master window/door lock/unlock switch, coupe

Schematic

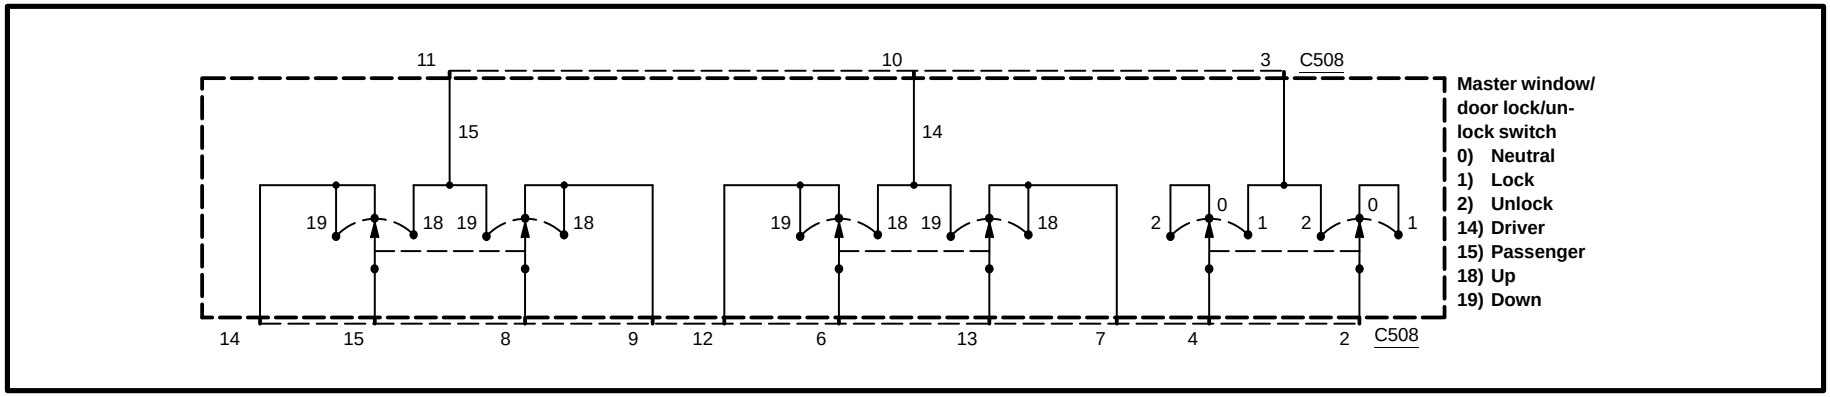

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Power and Ground Checks Before Any Other Tests	10 and 12, 10 and 7, 11 and 14, 11 and 9	All window switches all positions	Open circuit
	7 and 13, 12 and 6, 9 and 8, 14 and 15	All window switches, at rest	Closed circuit
	3 and 2, 4	Door lock switch, at rest	Open circuit
Left front window circuit	10 and 6, 13 and 7	Up	Closed circuit
	10 and 13, 6 and 12	Down	Closed circuit
Right front window circuit	11 and 15, 8 and 9	Up	Closed circuit
	11 and 8, 15 and 14	Down	Closed circuit
Door lock switch	4 and 3	Lock	Closed circuit
	2 and 3	Unlock	Closed circuit

Terminals

C508

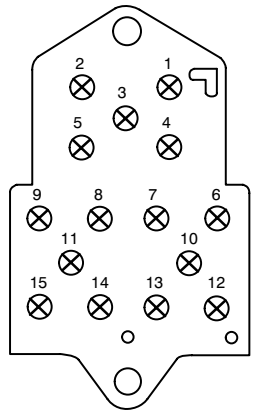

F15029