C290a (BK)

14401

Radio (18806)

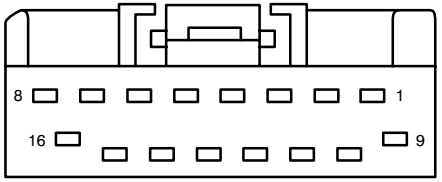

F16071

Pin	Circuit	Circuit function
1	19 (LB/RD)	Instrument illumination +
2	57 (BK)	Ground
3	1000 (RD/BK)	Voltage supplied in Start (overload protected)
4	–	not used
5	802 (OG/RD)	Speaker, right rear (18808) +
6	803 (BN/PK)	Speaker, right rear (18808) –
7	805 (WH/LG)	Speaker, right front (18808) +
8	811 (DG/OG)	Speaker, right front (18808) –
9	797 (LG/VT)	Voltage supplied at all times (overload protected)
10	296 (WH/VT)	Voltage in Run or Accessory (overload protected)
11	694 (BK/LG)	Ground
12	800 (GY/LB)	Speaker, left rear (18808) +
13	801 (TN/YE)	Speaker, left rear (18808) –
14	804 (OG/LG)	Speaker, left front (18808) +
15	813 (LB/WH)	Speaker, left front (18808) –
16	694 (BK/LG)	Ground

C290b (BK)

* Pioneer Ultimate Audio

14401

Radio (18806)



F08185

Pin	Circuit	Circuit function
1	168 (RD/BK)	RX, signal
2	167 (BN/OG)	TX, signal
3	57 (BK)	Ground
	*819 (LG/WH)	Radio (18806), output, Speaker, left front (18808) –
4	173 (DG/VT)	Radio (18806) - Subwoofer, High, mute
5	*820 (DB/YE)	Radio (18806), output, Speaker, left front (18808) +
6	*816 (LG/VT)	Radio (18806), output, Speaker, right front (18808) +
7	*815 (LG/OG)	Radio (18806), output, Speaker, right front (18808) –
8	–	not used