Power seat switch, left

Schematic

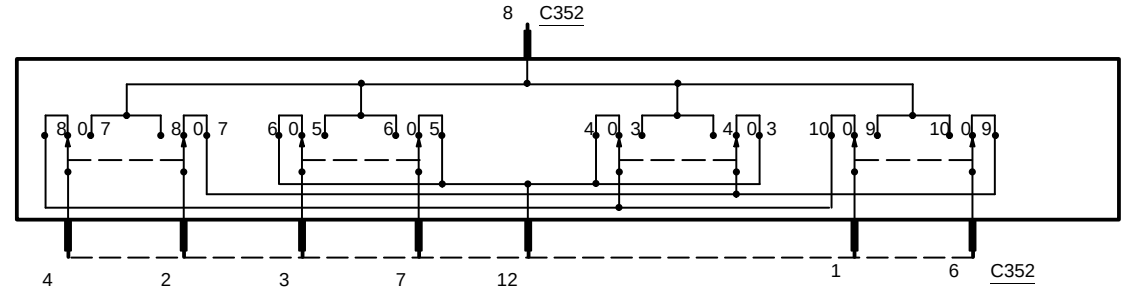

N421
Power seat switch, left
0) Rest
3) Lumbar inflate
4) Lumbar deflate
5) Seat forward
6) Seat rearward
7) Front up
8) Front down
9) Rear up
10) Rear down

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Power and Ground Checks Before Any Other Tests	1 and to except 3	at rest	Closed circuit
	3 and 1	at rest	Open circuit
front Tilt Circuit	3 and 7	Up	Closed circuit
	3 and 5	Down	Closed circuit
Rear Tilt Circuit	3 and 4	Up	Closed circuit
	3 and 6	Down	Closed circuit
Forward/rearward circuit	3 and 2	Forward	Closed circuit
	1 and 8	Rearward	Closed circuit

Terminals

C352