Ignition switch (11572)

Schematic

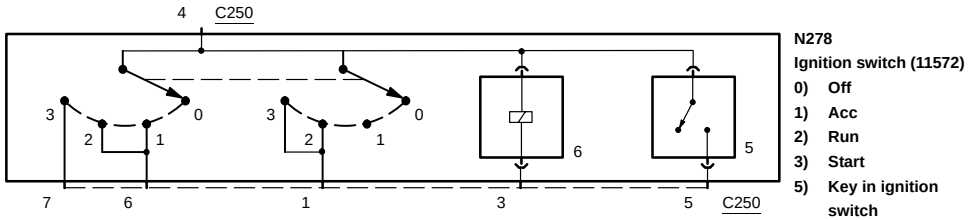

N278
Ignition switch (11572)
0) Off
1) Acc
2) Run
3) Start
5) Key in ignition switch
6) Key removal inhibit solenoid

Terminals

C250



F07109

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move key to these positions	A good switch will indicate
Run power circuit	4 and 1 4 and 6	Off/Lock	Open circuit
		Accessory	Open circuit
		Run	Closed circuit
		Start	Open circuit
Run/Start power circuit	4 and 1	Off/Lock	Open circuit
		Accessory	Open circuit
		Run	Closed circuit
		Start	Closed circuit
Run/Acc power circuit	4 and 6	Off/Lock	Open circuit
		Accessory	Closed circuit
		Run	Closed circuit
		Start	Open circuit
Start power circuit	4 and 7	Off/Lock	Open circuit
		Accessory	Open circuit
		Run	Open circuit
		Start	Closed circuit