Main light switch (11654)

Schematic

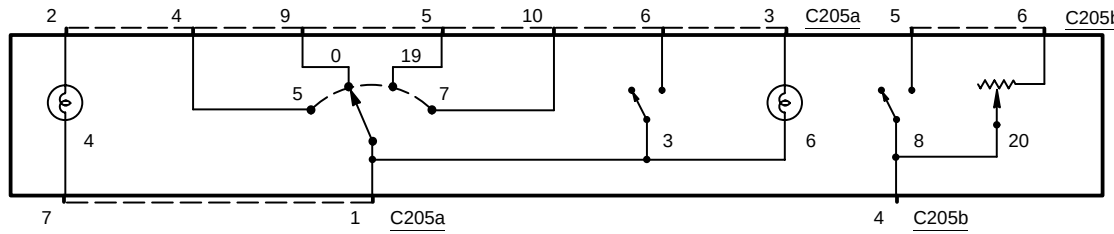

Main light switch (11654)
0) Off
3) Fog lamps
4) Illumination
5) Autolamp on
6) Fog lamp illumination
7) Head
8) Interior
19) Parking lamps
20) Dimmer
151–17

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Autolamp Circuit	4 and 1 (C205a)	Autolamps	Closed circuit
		Off	Open circuit
		Parking Lamps	
		Headlamps	
Parking lights circuit	5 and 1 (C205a)	Autolamps	Open circuit
		Off	
		Parking Lamps	Closed circuit
		Headlamps	Open circuit
Headlamp circuit	10 and 1 (C205a)	Autolamps	Open circuit
		Off	
		Parking Lamps	
		Headlamps	Closed circuit
Fog lamps Circuit	6 and 1 (C205a)	Fog lamps	Closed circuit
		Off	Open circuit
Interior lamps Circuit	5 and 4 (C205b)	Interior lamps	Closed circuit
		Off	Open circuit
Illumination dimmer resistor	6 and 4 (C205b)	Rotate knob clockwise	Ohmmeter will show smoothly increasing resistance

Terminals

C205a



C205b