Power Window Switch, Passenger Door

Terminals

C604



F06213

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Up Switch Circuit	3 and 5	Up	Closed circuit
	1 and 2 6 and 5	Rest	Closed circuit
Down Switch Circuit	3 and 2	Down	Closed circuit
	1 and 2 6 and 5	Rest	Closed circuit

Schematic

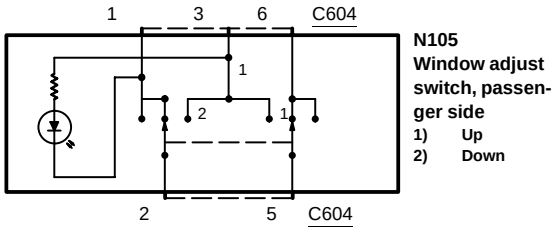

N105
Window adjust switch, passenger side
1) Up
2) Down