C452

14A005

E34
License plate lamp,
left



F02095

Pin	Circuit	Circuit function
1	29S-LF21 (OG/BK)	Voltage supplied at all times (overload protected), Switched
2	31S-LF21 (BK/GN)	Ground, Switched

C462

14A005

E35
License plate lamp,
right



F02095

Pin	Circuit	Circuit function
1	29S-LF22 (OG/BK)	Voltage supplied at all times (overload protected), Switched
2	31S-LF22 (BK/GN)	Ground, Switched

C461

14A005

E109
Reversing lamp,
right (13411)



F03099

Pin	Circuit	Circuit function
1	29S-LG16 (OG/GN)	Voltage supplied at all times (overload protected), Switched
2	–	not used
3	31S-LG16 (BK/RD)	Ground, Switched

C465

14A005

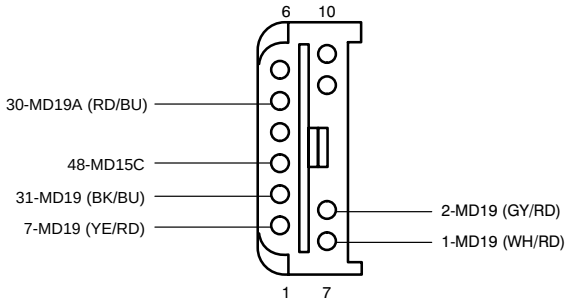

F10009

19B113

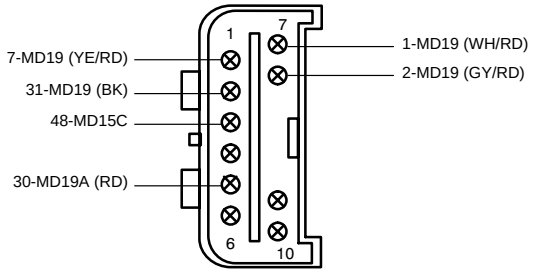

F10069