Power seat switch

Schematic

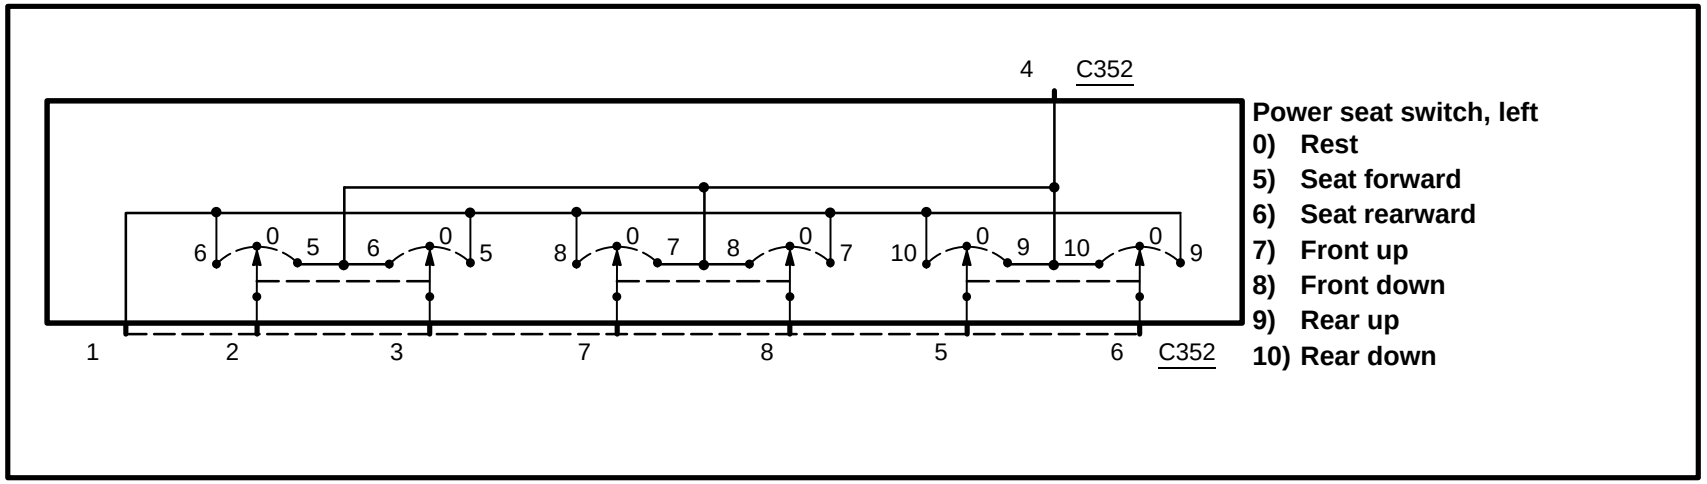

Terminals

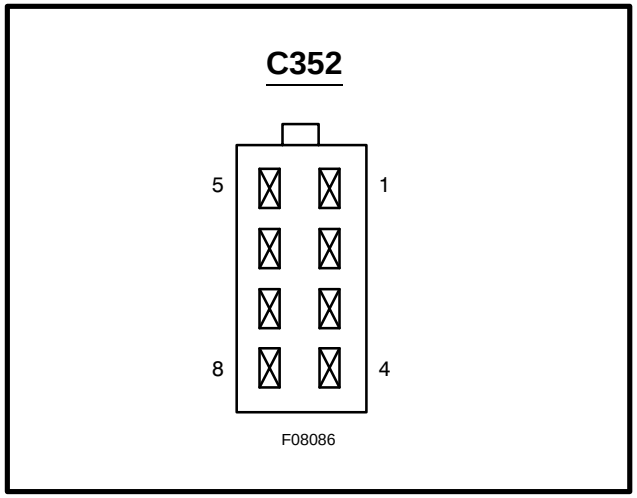

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Seat up/down circuit, rear	4 and 5	Up	Closed circuit
	5 and 1	Down	Closed circuit
	1 and 6	Up	Closed circuit
	6 and 4	Down	Closed circuit
Seat up/down circuit, front	7 and 4	Up	Closed circuit
	7 and 1	Down	Closed circuit
	8 and 1	Up	Closed circuit
	8 and 4	Down	Closed circuit
Seat forward/ rearward sensor	4 and 2	Forward	Closed circuit
	2 and 1	Rearward	Closed circuit
	3 and 1	Forward	Closed circuit
	3 and 4	Rearward	Closed circuit