## Multifunction Switch, Lamp Portion

### Schematic

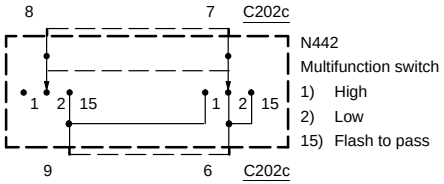


### Terminals

**C202c**




### Component testing procedure

| Circuit to test | Connect self–powered test light or ohmmeter to terminals | Move switch to these positions | A good switch will indicate |
|---|---|---|---|
| **High beam** | 7 and 9 | High beam | Closed circuit |
| | | Flash–to–pass | Open circuit |
| | | Low beam | Open circuit |
| **Low beam/Flash–to–pass** | 6 and 7 | High beam | Open circuit |
| | | Flash–to–pass | Open circuit |
| | | Low beam | Closed circuit |
| | 8 and 9<br>6 and 7 | High beam | Open circuit |
| | | Flash–to–pass | Closed circuit |
| | | Low beam | Open circuit |