C310a

14401

A208
Restraints control
module (14B321)

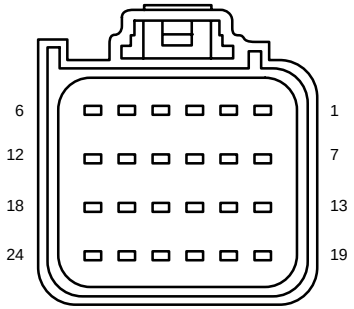

F24023

Pin	Circuit	Circuit function
1	614 (GY/OG)	Driver air bag, stage 1 +
2	615 (GY/WH)	Driver air bag, stage 1 –
3	607 (LB/OG)	Passenger air bag, stage 1 +
4	616 (PK/BK)	Passenger air bag, stage 1 –
5	1516 (YE/WH)	Driver air bag, stage II +
6	1517 (RD/OG)	Driver air bag, stage II –
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	70 (LB/WH)	Data bus ISO 9141 (K–line)
12	1003 (GY/YE)	Voltage, ignition switch in Start or Run (overload protected electronic module)
13	1518 (RD/WH)	Passenger air bag, stage II +
14	1519 (LG/RD)	Passenger air bag, stage II –
15	–	not used
16	649 (BK/OG)	logic ground
17	–	not used
18	–	not used
19	608 (BK/YE)	Air bag indicator, control
20	1003 (GY/YE)	Voltage, ignition switch in Start or Run (overload protected electronic module)
21	–	not used
22	1390 (DB)	tone driver
23	–	not used
24	–	not used