C310b

14A005

A208
Restraints control
module (14B321)

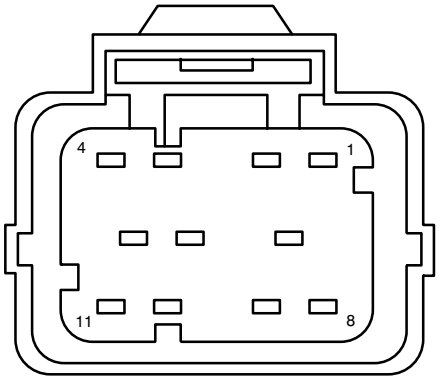

F11019

Pin	Circuit	Circuit function
1	964 (DB/LG)	Voltage supplied in Start and Run (overload protected)
2	615 (GY/WH)	Driver air bag, return
3	614 (GY/OG)	Driver air bag, feed, monitor
4	70 (LB/WH)	ISO Bus
5	616 (PK/BK)	Passenger air bag, return
6	607 (LB/OG)	Passenger air bag, feed, monitor
7	964 (DB/LG)	Voltage supplied in Start and Run (overload protected)
8	57 (BK)	Ground
9	608 (BK/YE)	Air bag indicator, control
10	57 (BK)	Ground
11	1083 (LB/BK)	Air bag, tone driver

C311

14A699

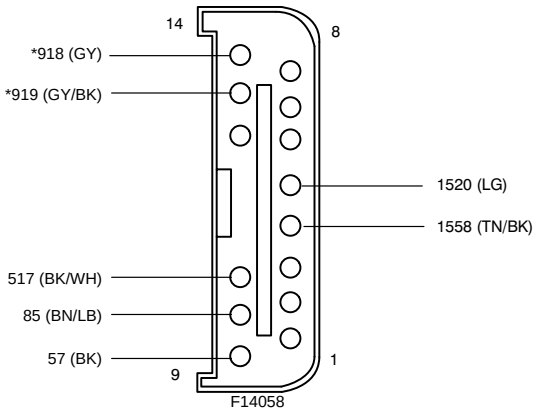

F14058

14A005

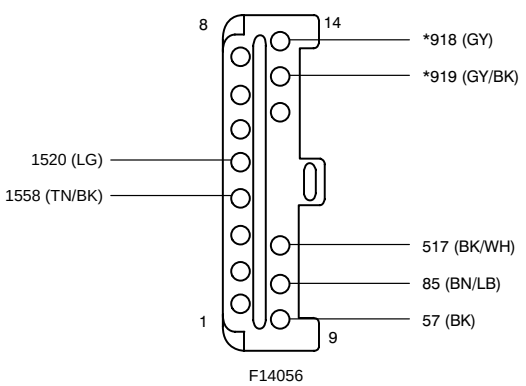

F14056