Multifunction Switch, Turn Portion (continued)

Schematic

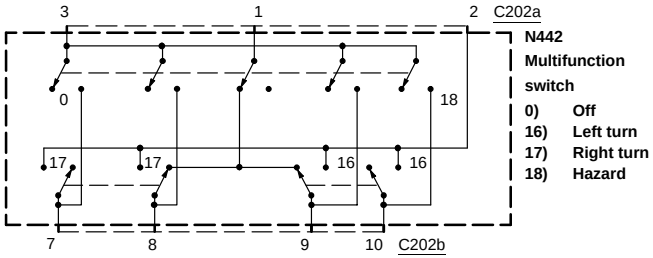

Terminals

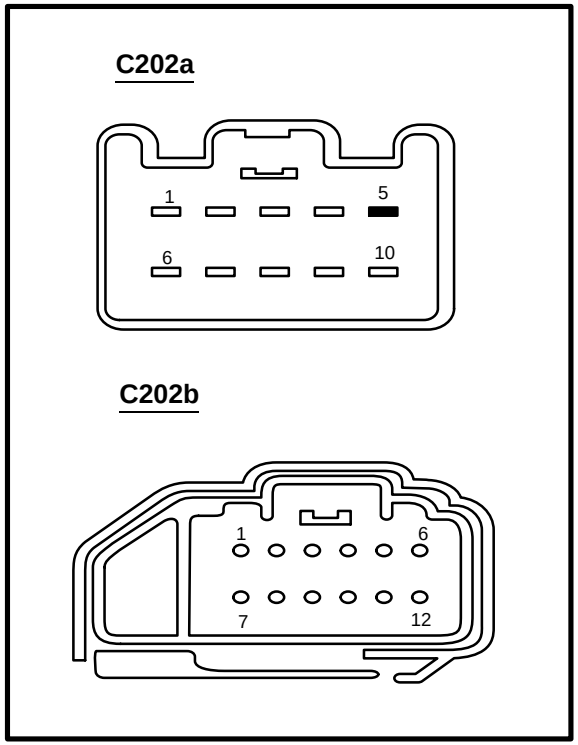

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Turn signal	C202a, 2 and C202b, 10	Left turn	Closed circuit
	C202a, 2 and C202b, 9	Off	Open circuit
	C202a, 2 and C202b, 7	Right turn	Closed circuit
	C202a, 2 and C202b, 8	Off	Open circuit
Hazard	C202a, 3 and C202b, 7	Turn signal switch in neutral , Hazard On	Closed circuit
	C202a, 3 and C202b, 8		
	C202a, 3 and C202b, 9		
	C202a, 3 and C202b, 10		
	C202a, 1 and C202b, 8	Turn signal switch in neutral , Hazard Off	Closed circuit
	C202a, 1 and C202b, 9		