Master window adjust switch (14529)

Schematic

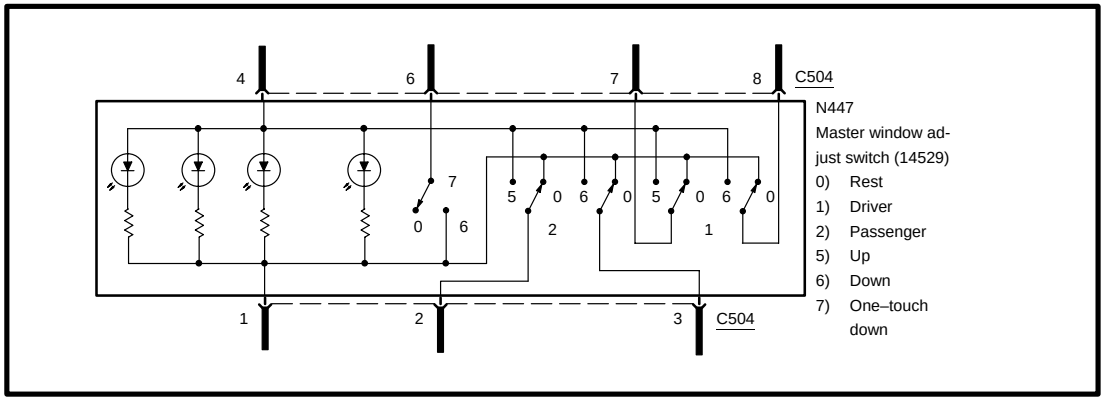

Terminals

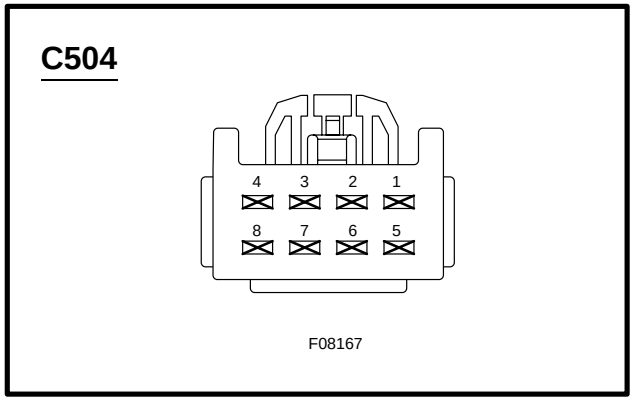

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
One–Touch Down Switch	1 and 6	Down	Closed circuit
		Neutral	Open circuit
Left front window circuit	7 and 1	Up	Closed circuit
	8 and 1	Down	Closed circuit
Right front window circuit	2 and 1	Up	Closed circuit
	3 and 1	Down	Closed circuit