C2188e (BK)

14401

Radio (18806)

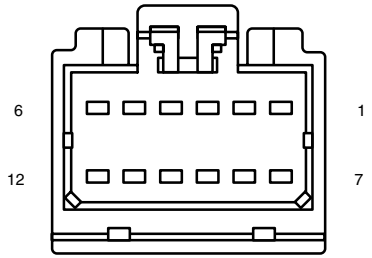

F12105

Pin	Circuit	Circuit function
1	167 (BN/OG)	Subwoofer, Audio signal positive
2	168 (RD/BK)	Subwoofer, Audio signal negative
3	173 (DG/VT)	Subwoofer, mute
4	48 (BK)	Shield
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	–	not used
12	–	not used

C2188f

14401

Radio (18806)



F01229

Pin	Circuit	Circuit function
1	(OG)	antenna (coaxial cable)

C2188g (GY)

PIA

Radio (18806)



F01235

Pin	Circuit	Circuit function
1	(BK)	Navigation, Antenna, to, Radio (18806)

C2216

* with EATC

CJB

Front blower motor relay



F05129

Pin	Circuit	Circuit function
30		Voltage supplied at all times (overload protected)
85	57 (BK)	Ground
86	753 (YE/RD)	Blower motor relay, control
	*461 (OG)	Front blower motor relay, control
87	399 (BN/YE)	Blower motor relay, output
87a	–	not used