Door lock switch, driver side (14028)

Schematic

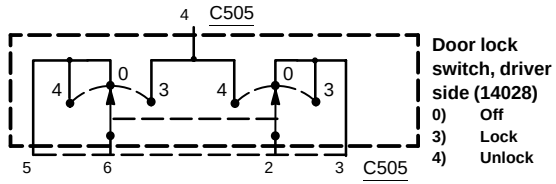

Terminals

C505



Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Lock Switch Circuit	4 and 6	Lock	Closed circuit
		Unlock	Open circuit
	2 and 3	Lock	Closed circuit
		Unlock	Open circuit
Unlock Switch Circuit	4 and 2	Lock	Open circuit
		Unlock	Closed circuit
	5 and 6	Lock	Open circuit
		Unlock	Closed circuit