Exterior rear view mirror switch (17B676)

Schematic

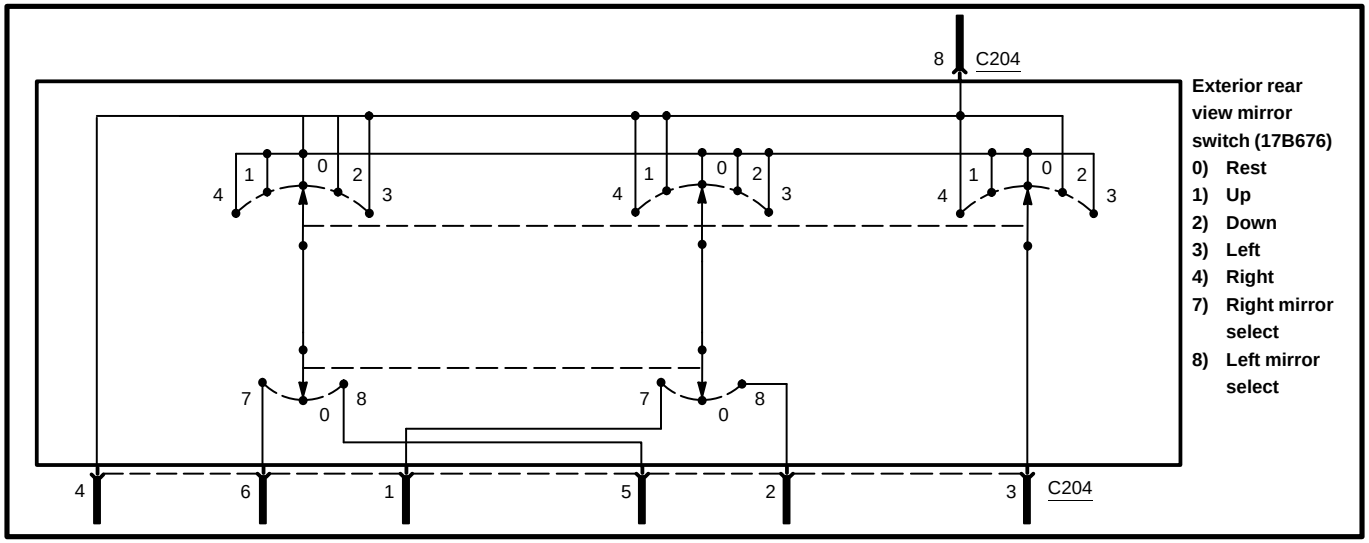

Terminals

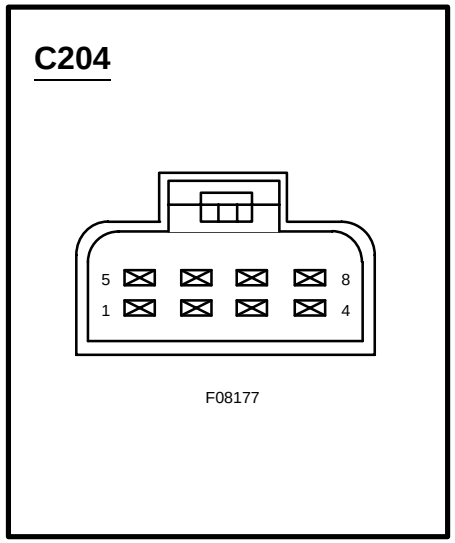

Component testing procedure

Circuit to test		Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Left mirror	**Up**	2 and 8 3 and 4	Selector switch Left Adjuster Switch Up	Closed circuit Closed circuit
	Down	2 and 4 2 and 8	Selector switch Left Adjuster Switch Down	Closed circuit Closed circuit
	Left	5 and 8 3 and 4	Selector switch Left Adjuster Switch Left	Closed circuit Closed circuit
	Right	5 and 4 3 and 8	Selector switch Left Adjuster Switch Right	Closed circuit Closed circuit
Right mirror	**Up**	1 and 8 3 and 4	Selector switch Right Adjuster Switch Up	Closed circuit Closed circuit
	Down	1 and 4 3 and 8	Selector switch Right Adjuster Switch Down	Closed circuit Closed circuit
	Left	6 and 8 3 and 4	Selector switch Right Adjuster Switch Left	Closed circuit Closed circuit
	Right	6 and 4 3 and 8	Selector switch Right Adjuster Switch Right	Closed circuit Closed circuit