## Power door lock switch -10

### Schematic

**Power door lock switch**

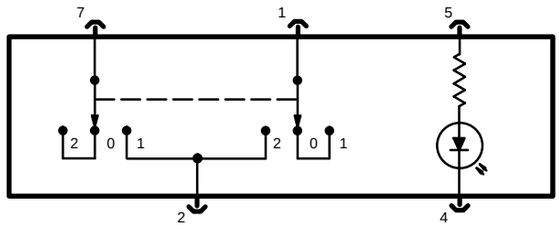


**N138**
**Door lock/unlock switch, passenger**
**0) Neutral**
**1) Lock**
**2) Unlock**

**N137**
**Door lock/unlock switch, driver**
**0) Neutral**
**1) Lock**
**2) Unlock**

### Terminal locations

**C794**
**N137**

F07054

**C794**
**N138**



### Component testing procedure

| Circuit to test | Connect self–powered test light or ohmmeter to terminals | Move switch to these positions | A good switch will indicate |
|---|---|---|---|
| **Lock/unlock circuit** | 2 and 1 | Neutral | Open circuit |
| | | Lock | Open circuit |
| | | Unlock | Closed circuit |
| | 2 and 7 | Neutral | Open circuit |
| | | Lock | Closed circuit |
| | | Unlock | Open circuit |
| | 1 and 7 | Neutral | Open circuit |
| | | Lock | Open circuit |
| | | Unlock | Open circuit |