Component Testing – Power seat switch, left – with memory

SCHEMATIC

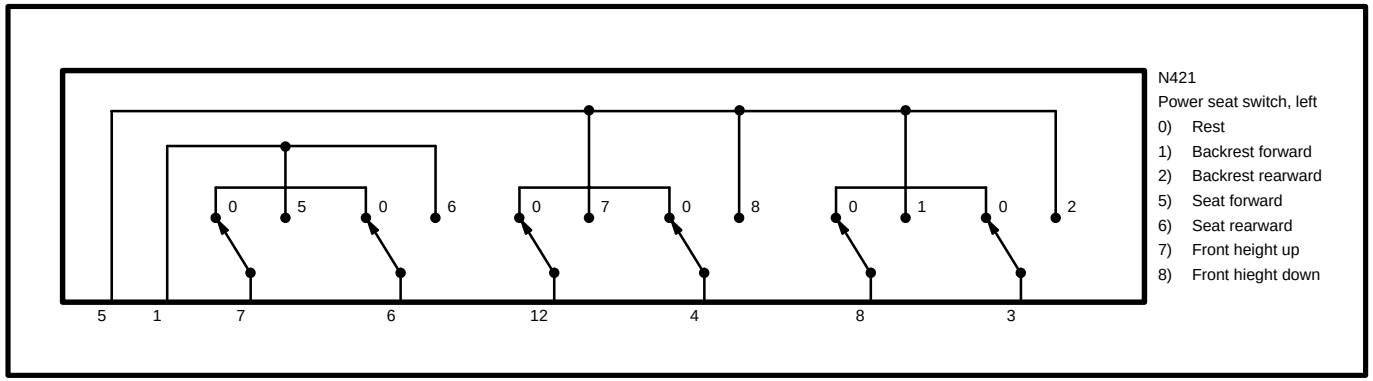

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Backrest Circuit	5 and 8	Rest	Open Circuit
		Backrest Forward	Closed Circuit
	5 and 3	Rest	Open Circuit
		Backrest Rearward	Closed Circuit
Forward/ Rearward Circuit	1 and 7	Rest	Open Circuit
		Seat Forward	Closed Circuit
	1 and 6	Rest	Open Circuit
		Seat Rearward	Closed Circuit
Height Circuit	5 and 12	Rest	Open Circuit
		Front Height Up	Closed Circuit
	5 and 4	Rest	Open Circuit
		Front Height Down	Closed Circuit
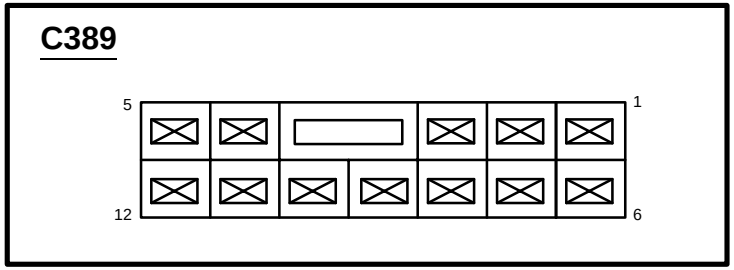
TERMINAL LOCATIONS