149-9 COMPONENT TESTING: LF DOOR LOCK SWITCH

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Lamp or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Door Lock Circuit	6 and 7	Lock	Closed
		Unlock	Open
	4 and 3	Lock	Closed
		Unlock	Open
Door Unlock Circuit	6 and 3	Lock	Open
		Unlock	Closed
	4 and 7	Lock	Open
		Unlock	Closed
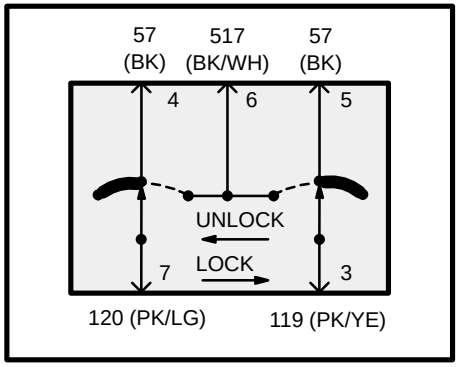
SCHEMATIC