Power window switch, RH side front

Schematic

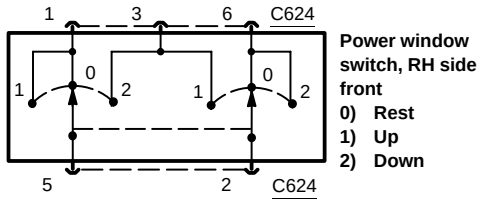

Power window switch, RH side front
0) Rest
1) Up
2) Down

Terminals

C624



F06213

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Window regulator circuit, Up	3 and 5	Up	Closed circuit
	1 and 2	Up	Closed circuit
Window regulator circuit, Down	2 and 3	Down	Closed circuit
	5 and 6	Down	Closed circuit
Master window control switch	1 and 2	Rest	Closed circuit
	5 and 6	Rest	Closed circuit