Ignition switch (11572)

Schematic

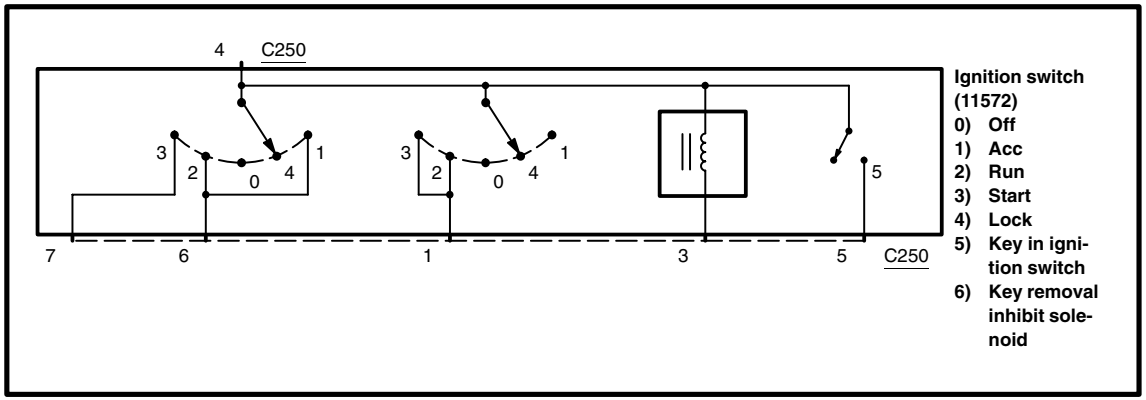

Terminals

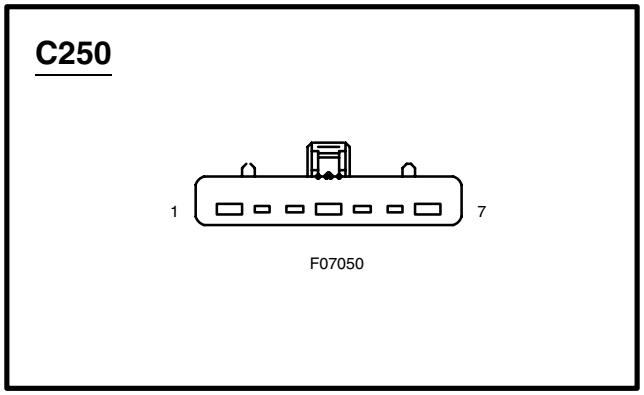

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Run/Start power circuit	4 and 1	Off/Lock	Open circuit
		Accessory	
		Run	Closed circuit
		Start	
Run/Acc power circuit	4 and 6	Off/Lock	Open circuit
		Accessory	Closed circuit
		Run	
		Start	Open circuit
Start power circuit	4 and 7	Off/Lock	Open circuit
		Accessory	
		Run	
		Start	Closed circuit
Key In	4 and 5	In	Closed circuit
		Out	Open circuit