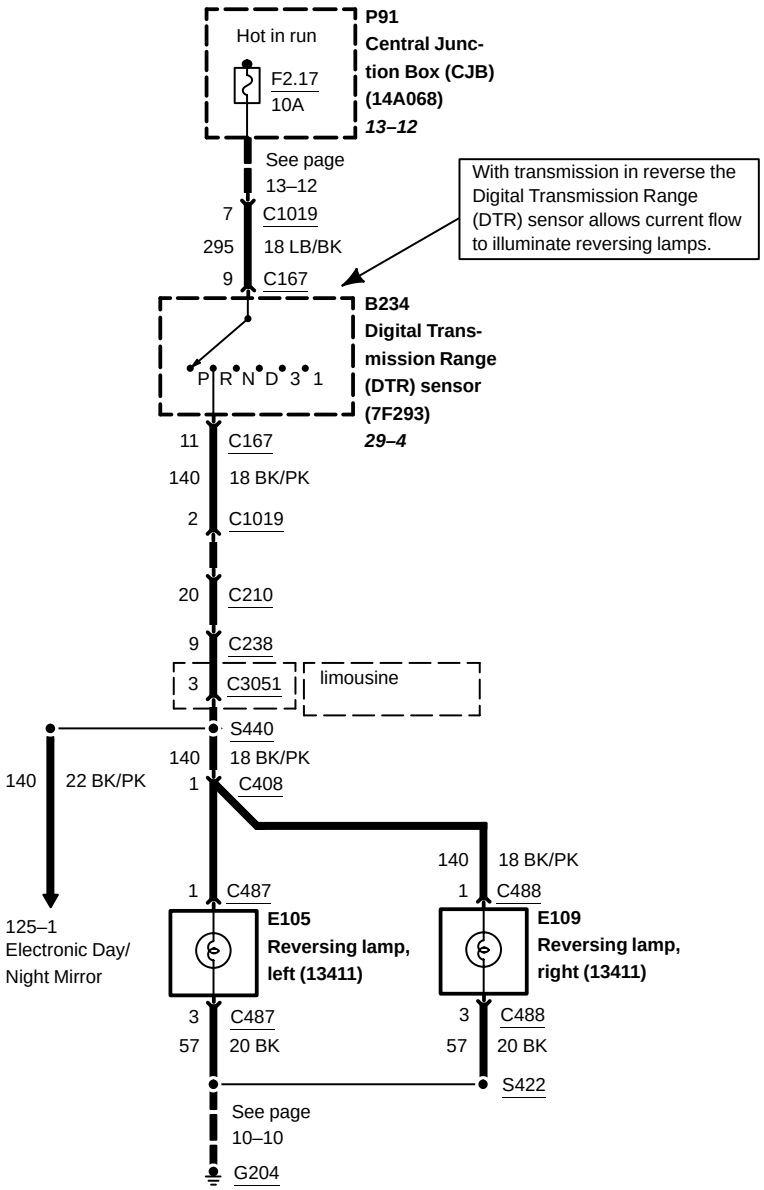
Hot in run
F2.17
10A
P91
Central Junction Box (CJB)
(14A068)
13–12
See page
13–12
7 C1019
295 18 LB/BK
9 C167
With transmission in reverse the Digital Transmission Range (DTR) sensor allows current flow to illuminate reversing lamps.
B234
Digital Transmission Range (DTR) sensor
(7F293)
29–4
P R N D 3 1
11 C167
140 18 BK/PK
2 C1019
20 C210
9 C238
3 C3051
limousine
S440
140 18 BK/PK
1 C408
140 22 BK/PK
125–1
Electronic Day/
Night Mirror
1 C487
E105
Reversing lamp, left (13411)
3 C487
57 20 BK
140 18 BK/PK
1 C488
E109
Reversing lamp, right (13411)
3 C488
57 20 BK
S422
See page
10–10
G204