# Headlamp switch, Exterior lamps

## Schematic

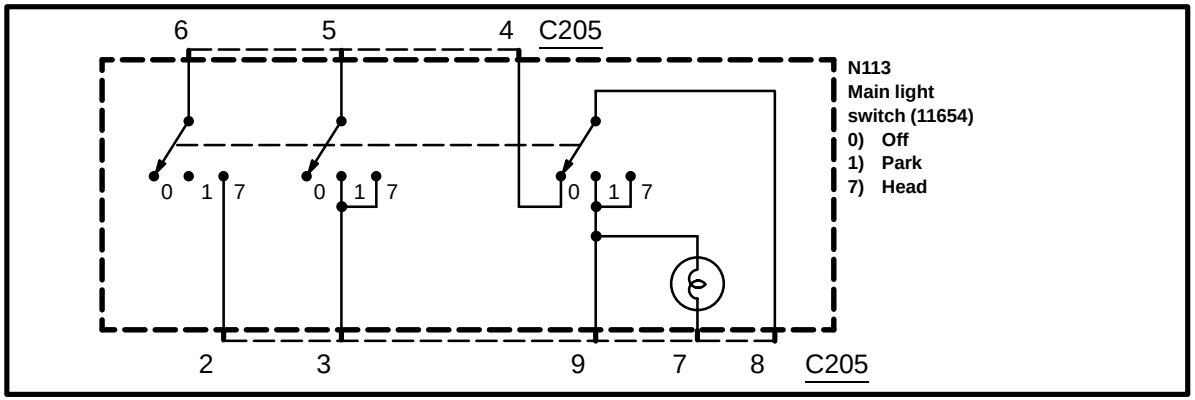


## Terminals

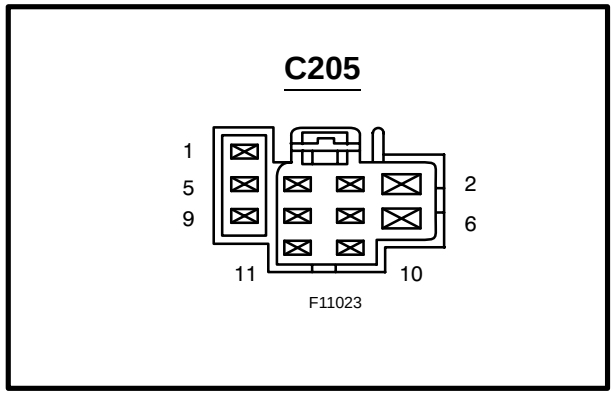


## Component testing procedure

| Circuit to test | Connect self–powered test light or ohm-meter to terminals | Move switch to these positions | A good switch will indicate |
|---|---|---|---|
| **Headlamp** | 6 and 2 | Off | Open circuit |
| | | Head | Closed circuit |
| | | Park | Open circuit |
| **Park lamps** | 4 and 9 | Off | Open circuit |
| | | Head | Closed circuit |
| | | Park | Closed circuit |
| **Fog lamps** | 5 and 3 | Off | Open circuit |
| | | Head | Closed circuit |
| | | Park | Closed circuit |