C2032a (WH)

14N104

A204
Smart Entry Control
(SEC)/Timer module

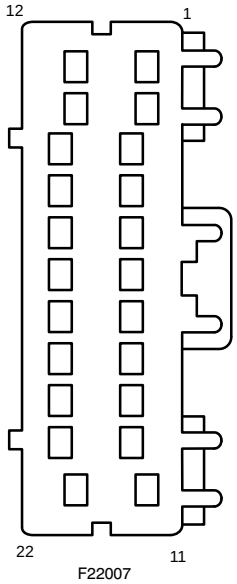

F22007

Pin	Circuit	Circuit Function
1	ST70 (GN/RD)	Voltage supplied at all times (overload protected)
2	–	not used
3	SC24 (VT)	Door unlock, switch sense
4	PH19 (GN/OG)	Door unlock, switch sense
5	PP42 (GN)	Safety belt indicator, control
6	SC15 (GN/YE)	Door unlock, switch sense
7	SC13 (LG/RD)	Voltage in Run or Accessory (overload protected)
8	ER10 (BU/OG)	Key warning switch, input
9	LI87 (RD)	Door ajar switch, left front
10	IP02 (BU)	Illumination dimmer, –
11	JC11 (PK/BK)	Illumination, Ground
12	SCE3 (BK)	Ground
13	–	not used
14	SC14 (RD/BU)	Door unlock, switch sense
15	PH10 (GN/WH)	Door lock, switch sense
16	SC16 (RD/YE)	Door unlock, switch sense
17	PS95 (GY)	Anti–theft ON indicator, control
18	–	not used
19	ER05 (LG)	Voltage supplied in Start and Run (overload protected)
20	IP01 (BU/RD)	Illumination dimmer, +
21	LI94 (RD/GN)	Sliding door ajar switch, right
22	MA41 (BN/WH)	Door ajar indicator, control