C229a

14B079

A246
Audio Visual Navigation (AVN) module (10E887)

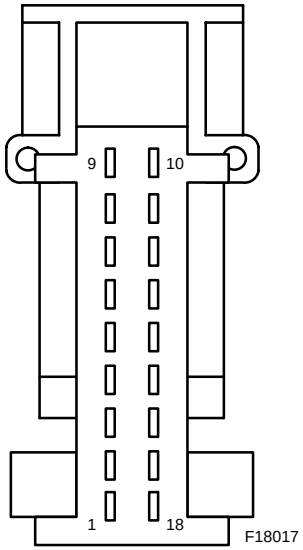

Pin	Circuit	Circuit function
1	729 (RD/WH)	Voltage supplied at all times (overload protected)
2	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
3	1045 (DB/WH)	Illumination dimmer, output
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	1530 (LB)	Speakers (+)
9	–	not used
10	57 (BK)	Ground
11	140 (BK/PK)	Voltage supplied in reverse
12	1541 (DB)	Vehicle Speed Sensor (VSS), to, Audio/navigation control unit, output
13	–	not used
14	–	not used
15	–	not used
16	–	not used
17	1531 (LG)	Speakers (–)
18	–	not used

C229b

14B079

A246
Audio Visual Navigation (AVN) module (10E887)

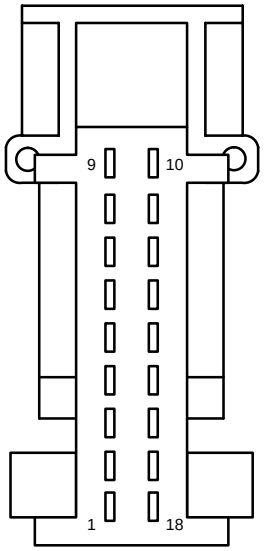

F18017

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	1537 (RD)	Audio/navigation control unit, feed
9	1532 (DB/WH)	Data Bus Systems (D2B+)
10	–	not used
11	–	not used
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	–	not used
17	1540 (DG)	Navigation display unit (10E899), Ground
18	1533 (DG/OG)	Data Bus Systems (D2B+)