Driver front door lock switch

Terminals

C505



F08193

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Lock Switch Circuit	7 and 4	Lock	Closed circuit
		Rest	Open circuit
Unlock Switch Circuit	3 and 4	Unlock	Closed circuit
		Rest	Open circuit

Schematic

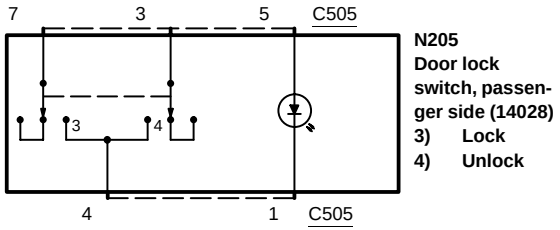

N205
Door lock switch, passenger side (14028)
3) Lock
4) Unlock