# 149-1 COMPONENT TESTING: INTRODUCTION/MAIN LIGHT SWITCH



## INTRODUCTION

Component testing procedures are provided to determine whether a component is good or bad.

Testing information for each component includes a schematic with component terminal locations and step-by-step test procedures. Component terminals are identified:

1. by the circuit number of the wires that connect to that terminal;
2. by the wire insulation color; and
3. by letters or numbers that may be marked on the component.

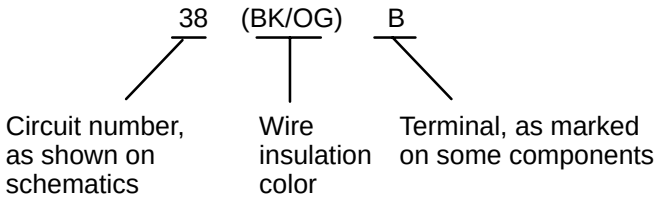


**COMPONENT TESTING PROCEDURE**

| TO TEST | Connect Self-Powered Test Lamps or Ohmmeter to Terminals | Move Switch to These Positions | A Good Switch Will Indicate |
|---|---|---|---|
| **Headlamp Circuit** | 8 and 9 | Off<br>Park<br>Head | Open Circuit<br>Open Circuit<br>Closed Circuit |
| **Park Lamp Circuit** | 11 and 12 | Off<br>Park<br>Head | Open Circuit<br>Closed Circuit<br>Closed Circuit |
| **Interior Lamp Circuit** | 2 and 4 | Knob rotated fully counterclockwise (In Detent)<br>Knob rotated fully clockwise (Out of Detent) | Closed Circuit<br>Open Circuit |
| **Panel Lamp Dimmer Circuit** | 6 and 1 | Knob rotated left from full right position | Ohmmeter will show smoothly decreasing resistance |