Late production

C4208a

14A005

Radio amplifier

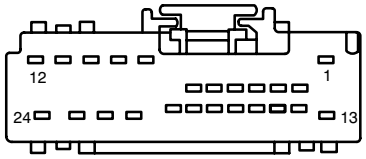

F24021

Pin	Circuit	Circuit function
1	797 (LG/VT)	Voltage supplied at all times (overload protected)
2	280 (LG)	Speaker, left front (18808), Audio signal positive
3	857 (WH/OG)	Speaker, left front (18808), Audio signal negative
4	168 (RD/BK)	Subwoofer, Audio signal negative
5	167 (BN/OG)	Subwoofer, Audio signal positive
6	277 (LB/BK)	Speaker, left rear (18808), Audio signal positive
7	859 (YE)	Speaker, left rear (18808), Audio signal negative
8	–	not used
9	–	not used
10	–	not used
11	–	not used
12	694 (BK/LG)	Ground
13	797 (LG/VT)	Voltage supplied at all times (overload protected)
14	279 (WH/RD)	Speaker, right front (18808), Audio signal positive
15	858 (BN)	Speaker, right front (18808), Audio signal negative
16	–	not used
17	–	not used
18	278 (VT/WH)	Speaker, right rear (18808), Audio signal positive
19	855 (LB)	Speaker, right rear (18808), Audio signal negative
20	–	not used
21	–	not used
22	173 (DG/VT)	Subwoofer, mute
23	–	not used
24	694 (BK/LG)	Ground

Late production

C4208b

14A005

Radio amplifier



F16029

Pin	Circuit	Circuit function
1	805 (WH/LG)	Speaker, right front (18808) +
2	811 (DG/OG)	Speaker, right front (18808) –
3	804 (OG/LG)	Speaker, left front (18808) +
4	813 (LB/WH)	Speaker, left front (18808) –
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	803 (BN/PK)	Speaker, right rear (18808) –
10	802 (OG/RD)	Speaker, right rear (18808) +
11	800 (GY/LB)	Speaker, left rear (18808) +
12	801 (TN/YE)	Speaker, left rear (18808) –
13	287 (BK/WH)	Subwoofer 2, Audio signal negative
14	822 (BK/LG)	Subwoofer 2, Audio signal positive
15	288 (VT)	Subwoofer 1, Audio signal negative
16	823 (LG)	Subwoofer 1, Audio signal positive