149-7 COMPONENT TESTING: MICRO ISO RELAY

COMPONENT TESTING PROCEDURE

Connect battery pos. and neg. to terminals:	Check continuity from terminals:	Continuity will be:
1 and 2	3 to 4 and 3 to 5	From 3 to 5 only
–	1 to all others	To 2 only
–	3 to all others	To 4 only

TERMINALS

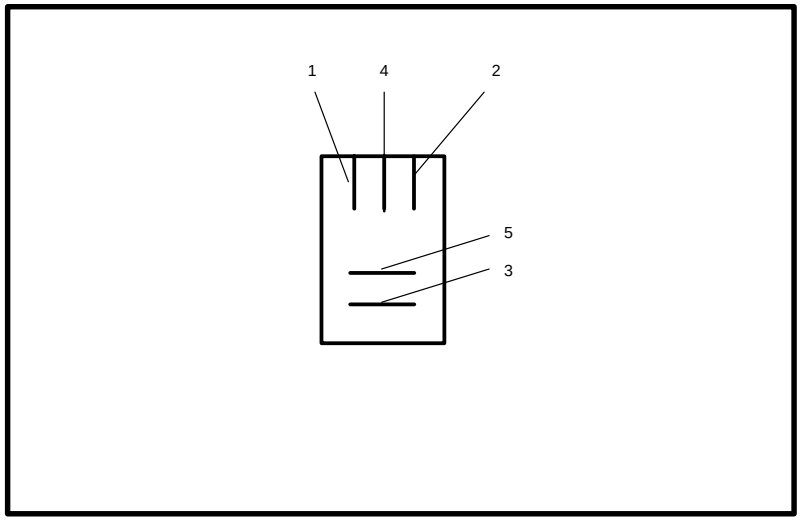
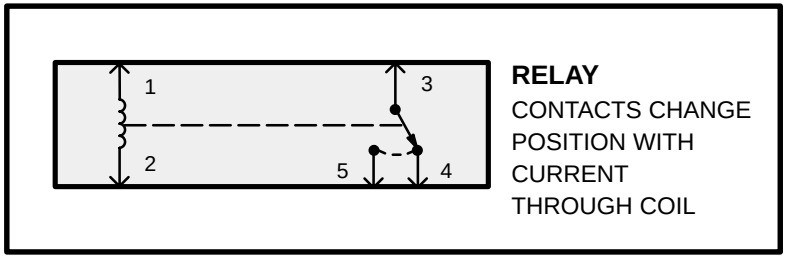
SCHEMATIC