C290a

14401

A220
Audio unit (18808)

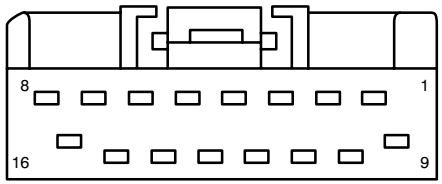

F16071

Pin	Circuit	Circuit function
1	19 (LB/RD)	Power, Hot with Headlamps on
2	57 (BK)	Ground
3	1000 (RD/BK)	Voltage supplied in Start (overload protected)
4	–	not used
5	802 (OG/RD)	Speaker, right rear (18808) +
6	803 (BN/PK)	Speaker, right rear (18808) –
7	805 (WH/LG)	Speaker, right front (18808) +
8	811 (DG/OG)	Speaker, right front (18808) –
9	797 (LG/VT)	Voltage supplied at all times (overload protected)
10	137 (YE/BK)	Voltage in Run or Accessory (overload protected)
11	694 (BK/LG)	audio ground
12	800 (GY/LB)	Speaker, left rear (18808) +
13	801 (TN/YE)	Speaker, left rear (18808) –
14	804 (OG/LG)	Speaker, left front (18808) +
15	813 (LB/WH)	Speaker, left front (18808) –
16	694 (BK/LG)	audio ground

C290b

14401 Early build

18A919 Late build

A220
Audio unit (18808)



F08197

Pin	Circuit	Circuit function
1	172 (LB/RD)	Radio (18806), output, Subwoofer –
2	169 (LG/BK)	Radio (18806), output, Subwoofer +
3	819 (LG/WH)	Radio (18806), output, Speaker, left front (18808) –
4	829 (WH/VT)	Remote
5	820 (DB/YE)	Radio (18806), output, Speaker, left front (18808) +
6	816 (LG/VT)	Radio (18806), output, Speaker, right front (18808) +
7	815 (LG/OG)	Radio (18806), output, Speaker, right front (18808) –
8	–	not used

C290c

18A919

Audio unit (18808)



F01041

Pin	Circuit	Circuit function
1	57 (BK)	Ground – Shield