-13

Power Window Switch

SCHEMATIC

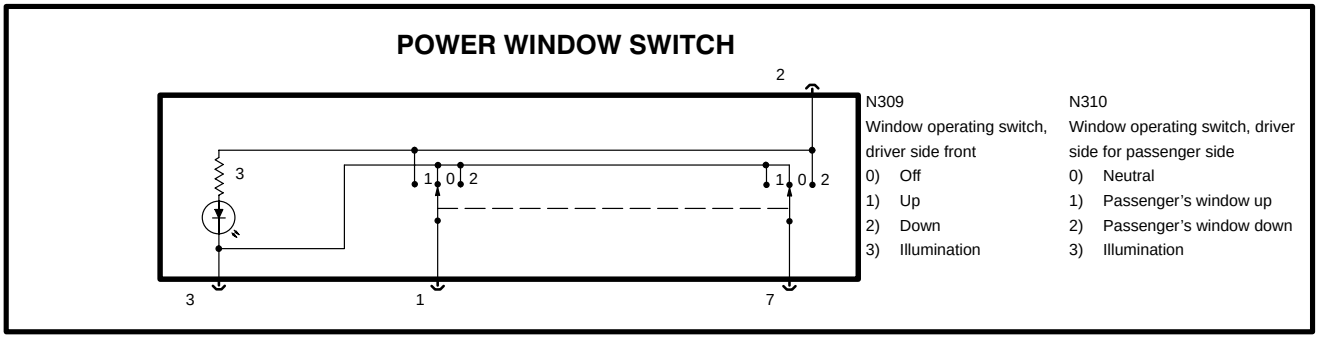

TERMINAL LOCATIONS

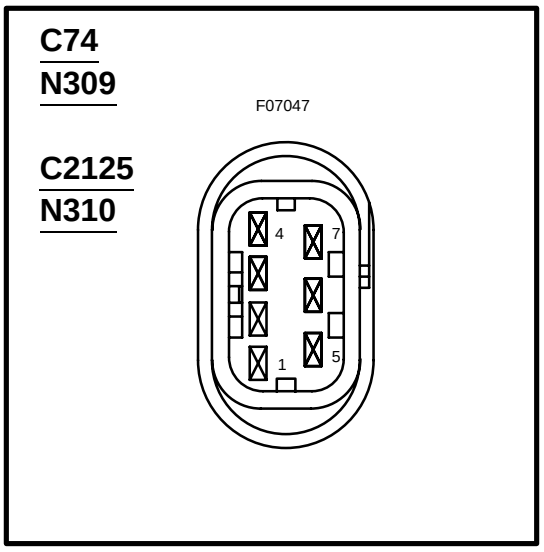

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Window Regulator Circuit	2 and 1	Off	Open Circuit
		Window up	Closed Circuit
		Window down	Open Circuit
	2 and 7	Off	Open Circuit
		Window up	Open Circuit
		Window down	Closed Circuit
	3 and 1	Off	Closed Circuit
		Window up	Open Circuit
		Window down	Closed Circuit
	3 and 7	Off	Closed Circuit
		Window up	Closed Circuit
		Window down	Open Circuit