Component Testing – Multifunction Switch, Turn Portion

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Turn Signal	1 and 8	Left Turn	Closed Circuit
	1 and 10	Left Turn	Closed Circuit
	1 and 5	Right Turn	Closed Circuit
	1 and 2	Right Turn	Closed Circuit
Hazard	4 and 8 4 and 5 4 and 10 4 and 2	Turn Signal Switch in Neutral, Hazard On	Closed Circuit
	4 and 8 4 and 5 4 and 10 4 and 2	Turn Signal Switch in Neutral, Hazard Off	Open Circuit
	9 and 10 9 and 2	Turn Signal Switch in Neutral, Hazard Off	Closed Circuit
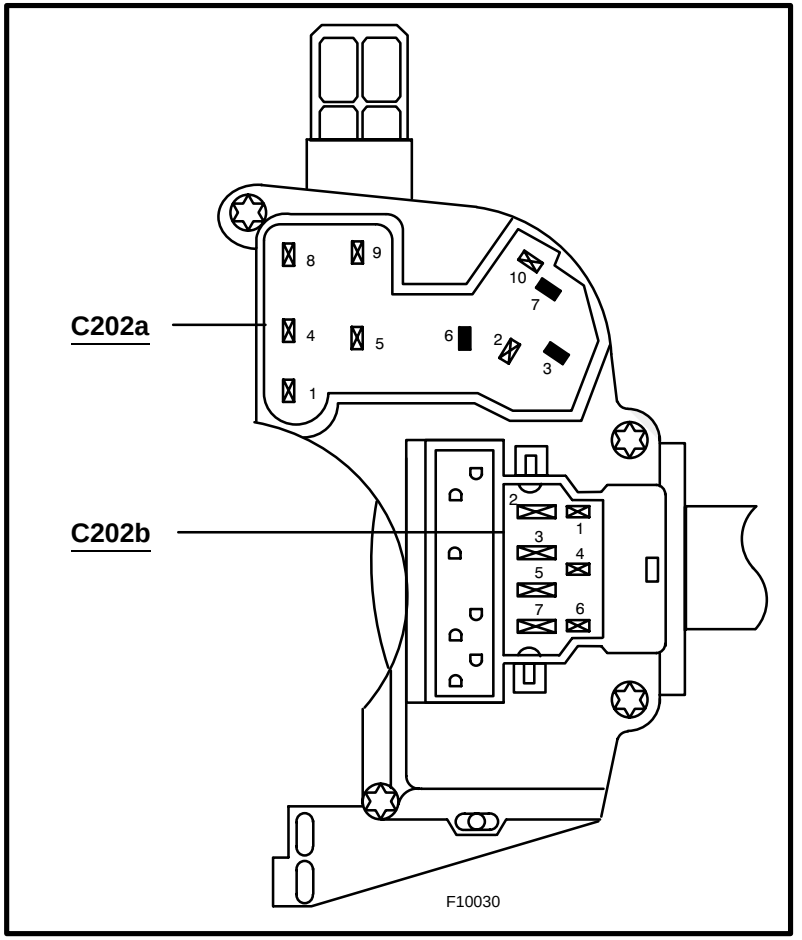
TERMINALS