Master window/door lock/unlock switch

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Lock Switch Circuit	8 and 9	Lock	Closed circuit
	7 and 10	Lock	Closed circuit
		Rest	Closed circuit
Unlock Switch Circuit	8 and 7	Unlock	Closed circuit
	6 and 9	Unlock	Closed circuit
		Rest	Closed circuit

Schematic

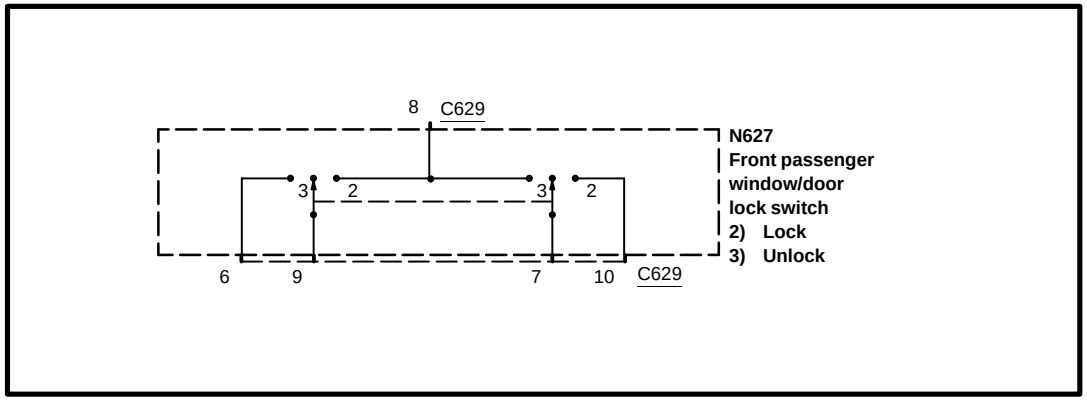
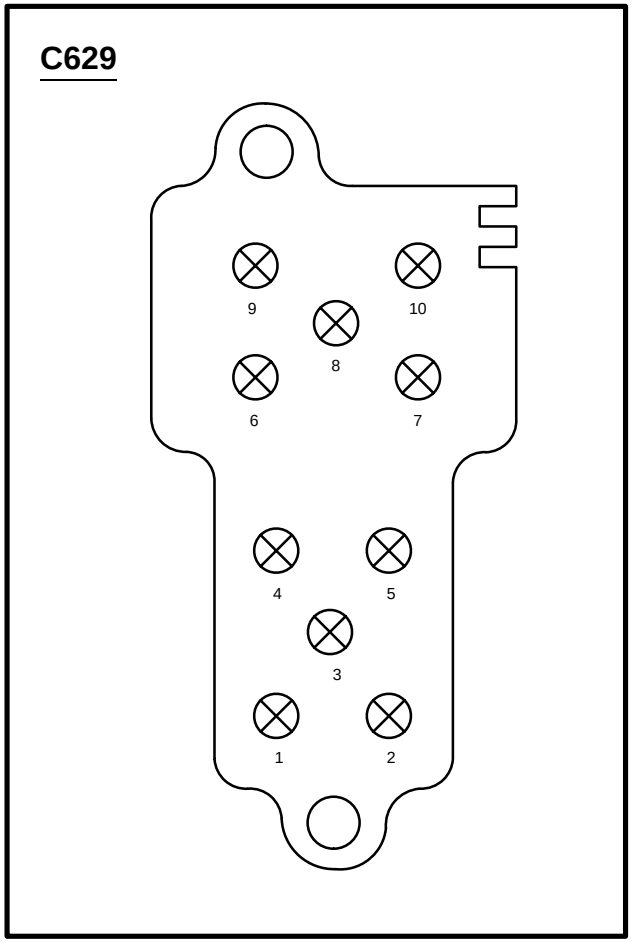
Terminals