Exterior rear view mirror switch (17B676)

Schematic

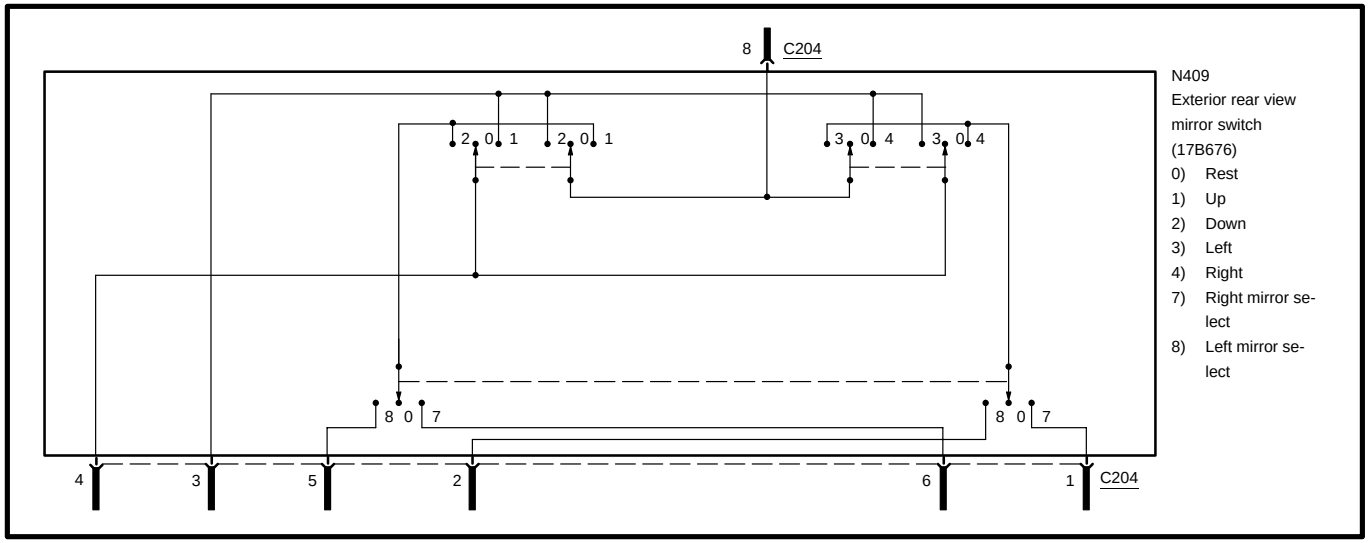

Terminals

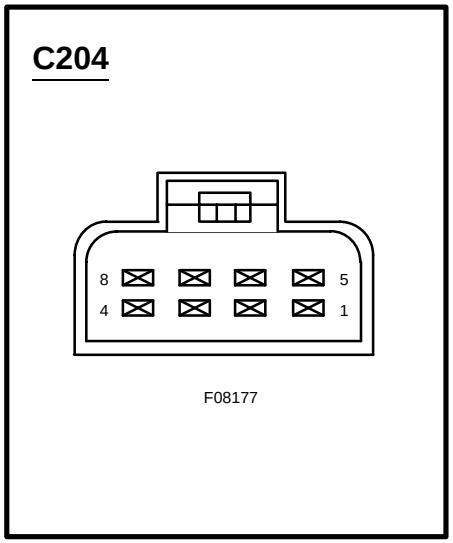

Component testing procedure

Circuit to test		Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Left mirror	**Up**	8 and 3 3 and 4	Selector switch Left Adjuster Switch Up	Closed circuit Closed circuit
	Down	8 and 4 4 and 3	Selector switch Left Adjuster Switch Down	Closed circuit Closed circuit
	Left	6 and 4 8 and 3	Selector switch Left Adjuster Switch Left	Closed circuit Closed circuit
	Right	6 and 8 3 and 4	Selector switch Left Adjuster Switch Right	Closed circuit Closed circuit
Right mirror	**Up**	8 and 2 3 and 4	Selector switch Right Adjuster Switch Up	Closed circuit Closed circuit
	Down	8 and 3 4 and 2	Selector switch Right Adjuster Switch Down	Closed circuit Closed circuit
	Left	1 and 4 8 and 3	Selector switch Right Adjuster Switch Left	Closed circuit Closed circuit
	Right	1 and 8 3 and 4	Selector switch Right Adjuster Switch Right	Closed circuit Closed circuit