

DRIVE SOLUTIONS FOR E-VEHICLES



Rotodrive is unit of Rotomotive Powerdrives India Limited, part of Rotomag group, which since 25 years has been a leading manufacturer of PMDC motors, BLDC motors, AC motors, Gearboxes for a variety of battery operated applications, industrial as well as marine applications. Rotodrive Drive Solutions are ideally suited for harsh Indian conditions and high temperature fluctuations. After extensive in-house research and rigorous testing, the Rotodrive drive solutions offer higher reliability and superior performance which ensures that the e-vehicles using the drive train would benefit from a higher return on investment. A pan India support network ensures a quick response to customer needs.



Leader in
Permanent
Magnet & BLDC
Motors in India



12 Lacs+
motors &
Gearboxes
installed



Core competence in
PMD, BLDC, AC,
and Gear motor
technologies



Joint ventures
with European
partners



Large production
capacity &
2 lacs sq. feet factory
space to facilitate
quick ramp up



Exports to
35 countries
globally



Supplies to critical
applications like
Automotive, Wind,
Marine, Railways




55+ service
centres in India



500
employees



Rotodrive™ is a brand of Rotomotive Powerdrives India Ltd.

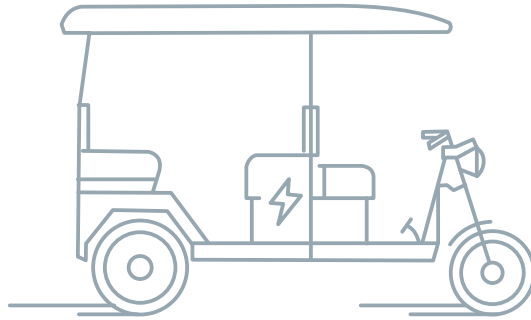


MAIN FEATURES

- BLDC Motor • Fan Cooled
- Hall Sensor • IP - 54
- Pinion Shaft & Keyway Shaft
- Efficient Motor ($\geq 80\%$ - Efficiency)

MOTOR SPECIFICATIONS & DIMENSIONS

Power (kW)	Rated Voltage (VDC)	Rated Torque (Nm)	Rated Current (Amps DC)	Rated Speed (RPM)	Pinion Data		Dimensional Data		
					Module	No. of Teeth	A	B	C
1	48	3.5	32	3000	1.25	16	212	50	65.5
1.2		4.1	35	3500					
1.5			49						
2			5				60		





CONTROLLER SPECIFICATIONS

Power (kW)	Voltage (VDC)	Max. Current (Amps DC)	Cooling	Efficiency
1	48	50	Naturally Cooled	$\geq 80\%$
1.2		55		
1.5		60		
2		80		



GEARBOX & DIFFERENTIAL SPECIFICATIONS

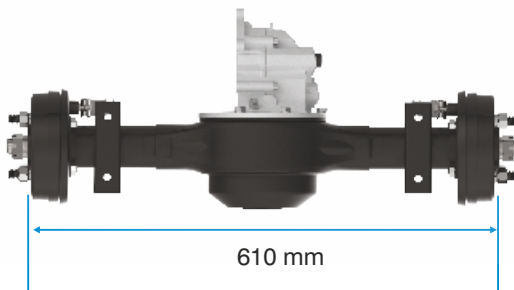

Single Speed Rigid Type Differential

Power (kW)	Size (mm)	Ratio (I)	Torque (Nm)	Brake
1	610	1:8.3 / 1:10 / 1:20.8	26 / 32 / 66	Ø130 Drum brake
1.2			31 / 37 / 77	
1.5			31 / 37 / 77	
2			37 / 45 / 94	


Double Speed Rigid Type Differential

Power (kW)	Size (mm)	Ratio (I)	Torque (Nm)	Brake
1	610	1:8.3 & 1:20.8	26 & 66	Ø130 Drum brake
1.2			31 & 77	
1.5			31 & 77	
2			37 & 94	






GEARBOX & DIFFERENTIAL SPECIFICATIONS

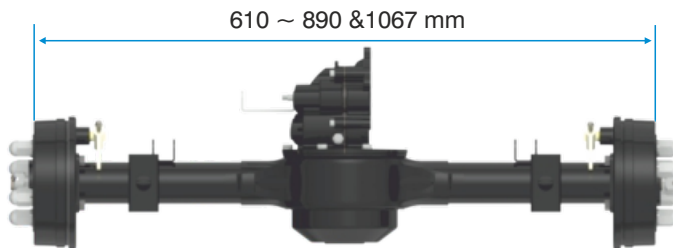

4 x M14 Stud



PCD 100




Single Speed Rigid Type Differential

Power (kW)	Size (mm)	Ratio (l)	Torque (Nm)	Brake
1	610~890 & 1067	1:8.3 / 1:10 / 1:20.8	26 / 32 / 66	Ø160 drum and hydraulic brake
1.2			31 / 37 / 77	
1.5			31 / 37 / 77	
2			37 / 45 / 94	

Double Speed Rigid Type Differential

Power (kW)	Size (mm)	Ratio (l)	Torque (Nm)	Brake
1	610~890 & 1067	1:8.3 & 1:20.8	26 & 66	Ø160 drum and hydraulic brake
1.2			31 & 77	
1.5			31 & 77	
2			37 & 94	

L3 FLOATING TYPE DIFFERENTIAL

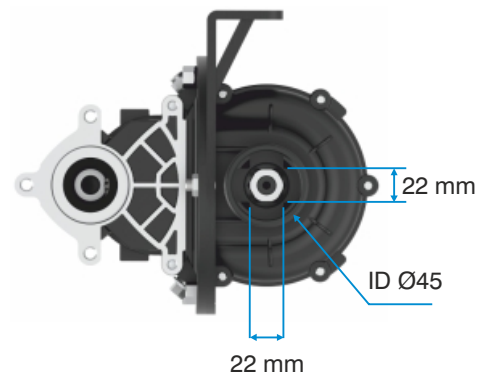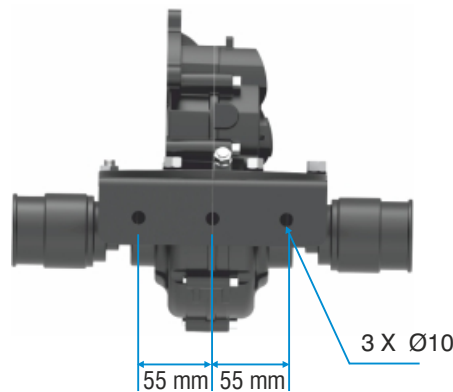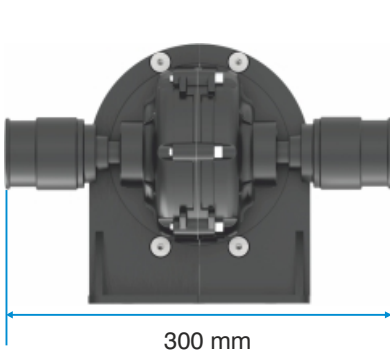



Single Speed Differential

Power (kW)	Size (mm)	Ratio (l)	Torque (Nm)	Cup Details
1	300	1:8.3 / 1:10 / 1:20.8	26 / 32 / 66	Biopod Cups
1.2			31 / 37 / 77	
1.5			31 / 37 / 77	
2			37 / 45 / 94	

Double Speed Differential

Power (kW)	Size (mm)	Ratio (l)	Torque (Nm)	Cup Details
1	300	1:8.3 & 1:20.8	26 & 66	Biopod Cups
1.2			31 & 77	
1.5			31 & 77	
2			37 & 94	



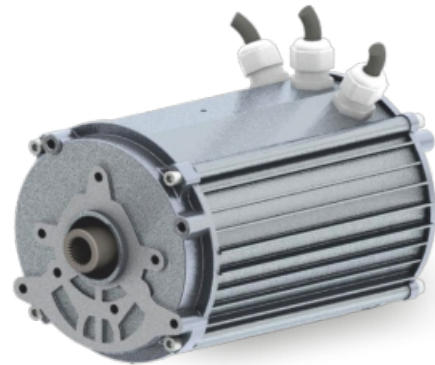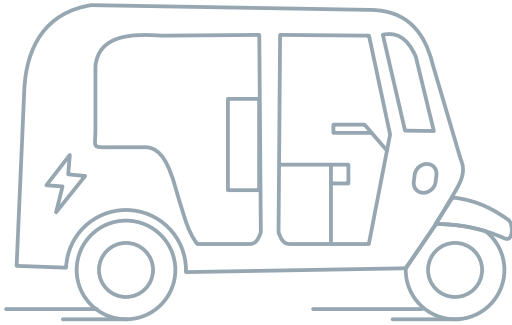


MAIN FEATURES

- PMSM Motor • Naturally Cooled • Encoder • IP - 65
- Internal Spline Shaft • Efficient Motor ($\geq 90\%$ - Efficiency)

MOTOR SPECIFICATIONS & DIMENSIONS

Power (kW)	Rated Voltage (VDC)	Rated Torque (Nm)	Rated Current (Amps DC)	Rated Speed (RPM)	Internal Spline Data		Dimensional Data		
					Module	No. of Spline	A	B	C
3	60	9.5	55	3000	1	18	250	16	50
4		12.7	74				290		
5		15.9	92				350		
6		19	111						



CONTROLLER SPECIFICATIONS




Power (kW)	Voltage (VDC)	Max. Current (Amps DC)	Cooling	Efficiency
3	60	140	Naturally Cooled	$\geq 90\%$
4		180		
5		180		
6		200		

Available with CAN






L5 SINGLE SPEED RIGID TYPE DIFFERENTIAL

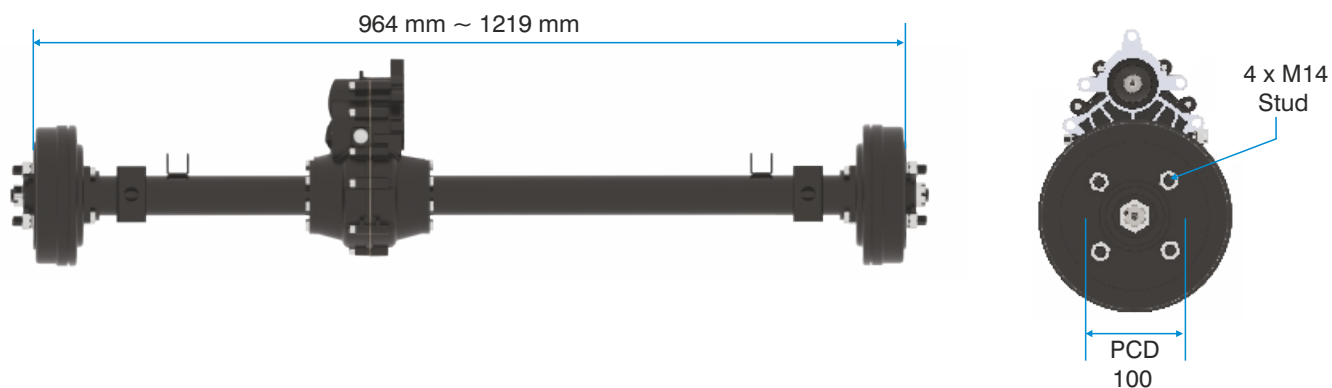




Power (kW)	Size (mm)	Ratio (l)	Torque (Nm)	Brake
3	964 ~ 1219	1:8 / 1:10 / 1:12	68 / 86 / 103	Ø180 Hydraulic brake
4			92 / 114 / 137	
5			114 / 143 / 172	
6			137 / 171 / 205	

L5 SINGLE SPEED FLOATING TYPE DIFFERENTIAL

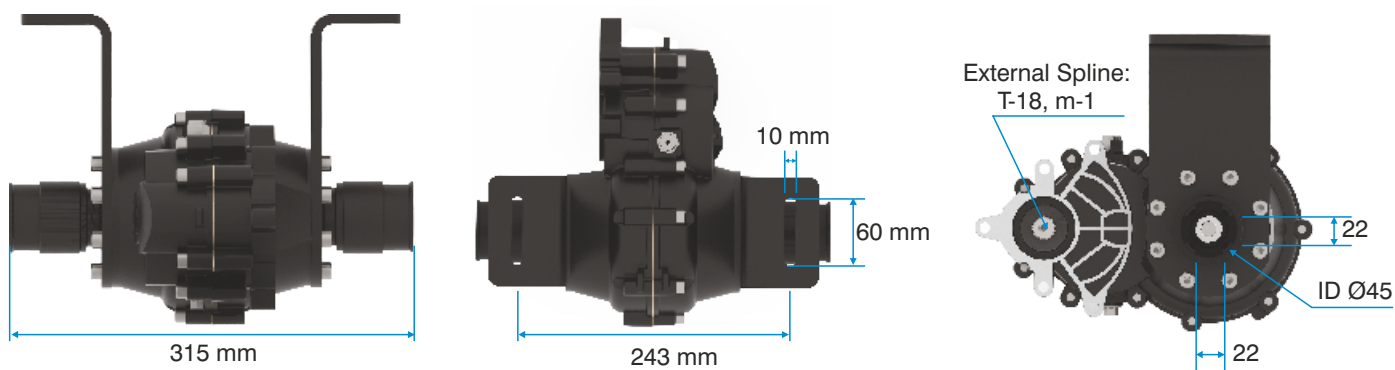

Power (kW)	Size (mm)	Ratio (l)	Torque (Nm)	Cup Details
3	315	1:8 / 1:10 / 1:12	68 / 86 / 103	*Biopod cups
4			92 / 114 / 137	
5			114 / 143 / 172	
6			137 / 171 / 205	

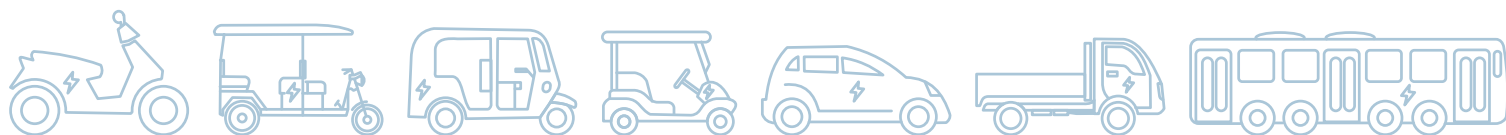

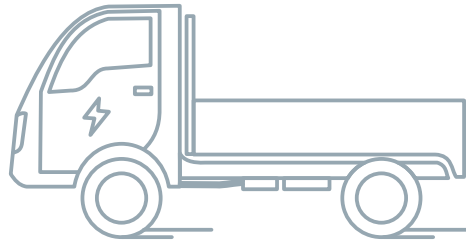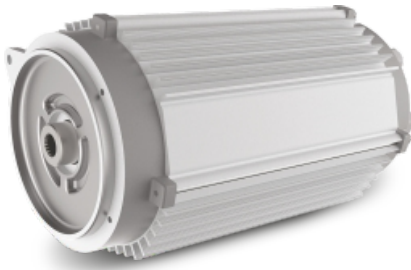


MAIN FEATURES

- PMSM Motor
- Naturally Cooled
- Encoder • IP - 65
- Internal Spline Shaft
- Efficient Motor ($\geq 90\%$ - Efficiency)

MOTOR SPECIFICATIONS & DIMENSIONS

Series	Power (kW)	Rated Voltage (VDC)	Rated Torque (Nm)	Rated Current (Amps DC)	Rated Speed (RPM)	Internal Spline Data		Dimensional Data				
						Module	No of Splines	A	B	C		
E10 Series	6	60	19	111	3000			1	18	200	16	50
	7.5	72	23.8	115		220						
	10		31.8	154								
E15 Series	12	96	45.8	138	2500	250						
	13.8	92	26	156	5100							
	15	96	57.3	160	2500							

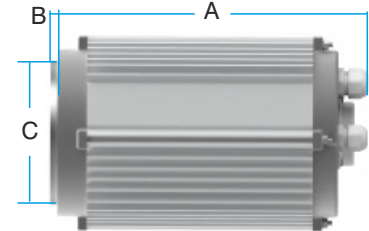


CONTROLLER SPECIFICATIONS

Series	Power (kW)	Voltage (VDC)	Max. Current (Amps DC)	Cooling	Efficiency
E10 Series	6	60	200	Naturally Cooled	$\geq 90\%$
	7.5	72	160		
	10		200		
E15 Series	12	96	325		
	15	96	420		



DIFFERENTIAL SPECIFICATIONS

Series	Power (kW)	Size (mm)	Ratio (I)	Torque (Nm)
E10 Series	6	964 ~ 1219	1:10/ 1:16	171/274
	7.5			214/343
	10			286/458
E15 Series	12			412/660
	13.8			234/374
	15			516/825

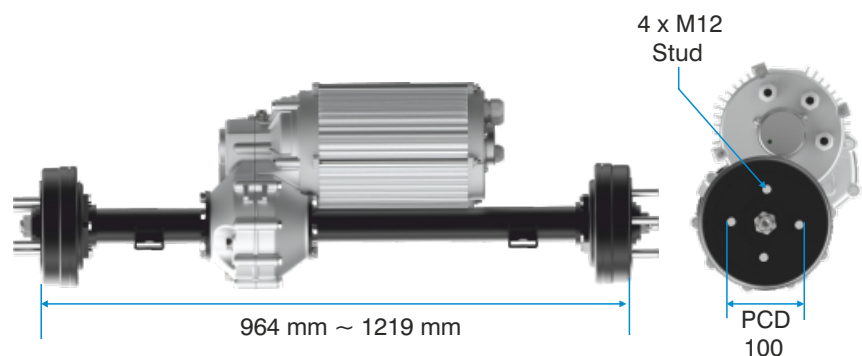

MANUFACTURING CAPABILITIES




GEAR MANUFACTURING



WINDING & IMPREGNATION




FABRICATION



HOUSING MACHINING



ASSEMBLY

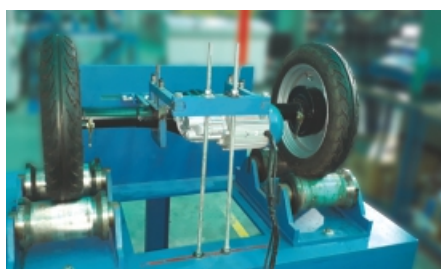

TESTING



DC MOTORS FOR
INDUSTRIAL APPLICATIONS

www.rotomag.com



SURFACE & SUBMERSIBLE
SOLAR PUMPS

www.rotosol.solar



AC MOTORS AND
GEARBOXES

www.rotomotive.com



PLANETARY & CYCLODIAL
GEARBOXES

www.cyplagear.com



Rotomotive Powerdrives India Ltd.

223, Napa Talpad, Gana-Borsad Road,
Tal: Borsad, Anand-388560 Gujarat, India

Phone : +91 93167 49042 / +91 93279 22250

Email : rotodrive@rotomotive.com

Web : www.rotodrive.com

Technical specifications/details mentioned in this leaflet are subject to change without prior notice.
Please contact our sales/marketing team for any updated information or any change done.



Rotodrive™ is a brand of Rotomotive Powerdrives India Ltd.