C290a

14B242

A11
Radio (18806)

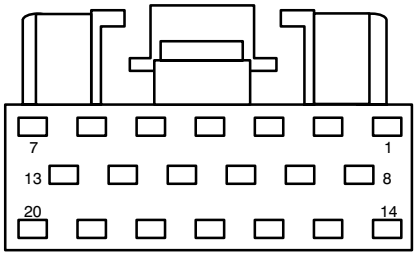

F20023

Pin	Circuit	Circuit Function
1	–	not used
2	–	not used
3	914 (TN/OG)	SCP Bus +
4	915 (PK/LB)	SCP Bus –
5	1068 (LG/BK)	Audio System ON (ASYSON)
6	832 (LB/PK)	Audio corporate protocol A
7	833 (TN)	Audio corporate protocol B
8	–	not used
9	–	not used
10	723 (GY/RD)	Cellular phone, wake up
11	724 (LB/YE)	Radio (18806), to cellular phone, audio –
12	725 (PK)	Radio (18806), to cellular phone, audio +
13	48	phone audio drain
14	276 (BN)	redundant audio control switch feed (SWC+)
15	–	not used
16	48	CD changer audio drain
17	690 (GY)	Radio (18806), to CD changer, Right +
18	799 (OG/BK)	Radio (18806), to CD changer, Right –
19	856 (VT)	Radio (18806), to CD changer, Left +
20	798 (LG/RD)	Radio (18806), to CD changer, Left –

C290b

14B242

A11
Radio (18806)



F08134

Pin	Circuit	Circuit Function
1	168 (RD/BK)	radio to sub–woofer high audio –
2	167 (BN/OG)	radio to sub–woofer high audio +
3	48	Shield
4	173 (DG/VT)	Radio (18806) – Subwoofer, High, mute
5	–	not used
6	–	not used
7	–	not used
8	–	not used