Main light switch (11654)

Schematic

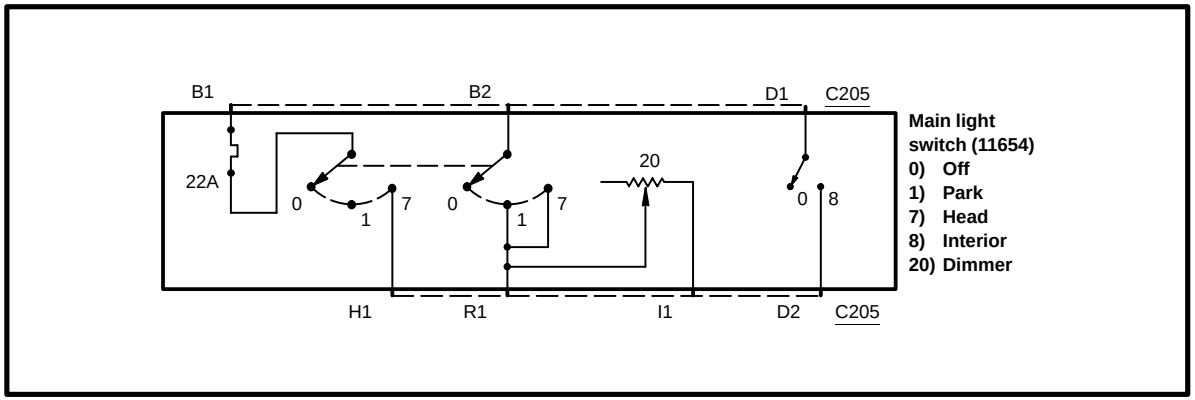

Terminals

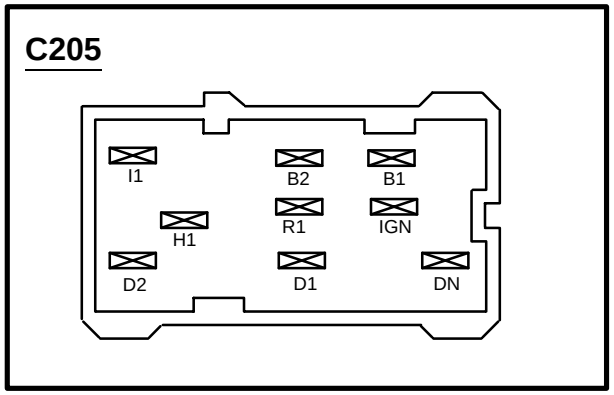

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move switch to these positions	A good switch will indicate
Headlamp	B1 and H1	Off	Open circuit
		Park	Open circuit
		Head	Closed circuit
Park lamps	B2 and R1	Off	Open circuit
		Park	Closed circuit
		Head	Closed circuit
Interior lamp	D1 and D2	Knob rotated fully counterclockwise (in detent)	Closed circuit
		Knob rotated fully clockwise (out of detent)	Open circuit
Illumination dimmer	R and I1	Rotate knob clockwise	Ohmmeter will show smoothly increasing resistance