COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Lamp or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Lock Switch Circuit	8 and 9	Lock	Closed Circuit
	7 and 10	Lock and at Rest	Closed Circuit
Unlock Switch Circuit	8 and 7	Unlock	Closed Circuit
	6 and 9	Unlock and at Rest	Closed Circuit

SCHEMATIC

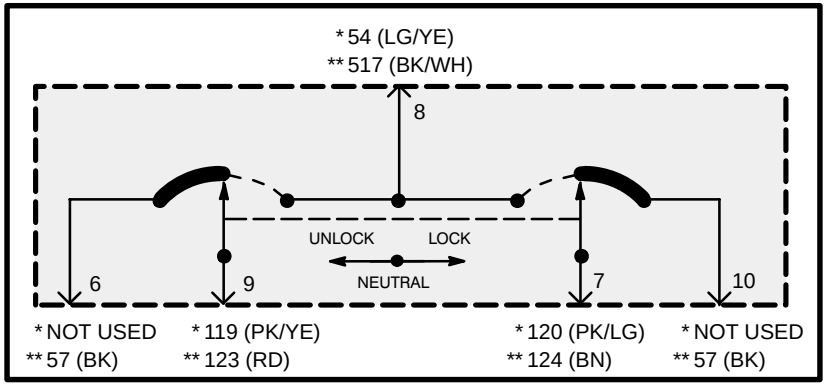

REVISED

TERMINALS
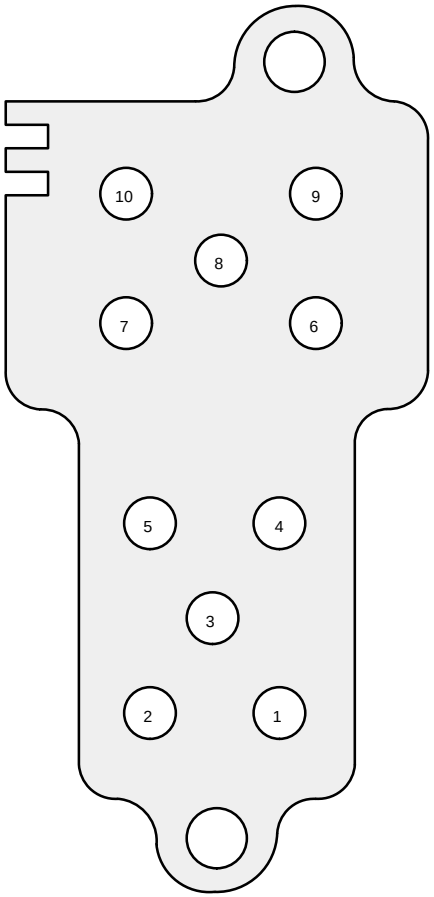
* WITH REMOTE/ KEYLESS ENTRY
** WITHOUT REMOTE/ KEYLESS ENTRY