149-9 COMPONENT TESTING: POWER SEAT SWITCH

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Lamp or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Power and Ground Checks Before any other test	3 and 1	All 4 switches at rest	Open Circuit
	1 and all others except 3	All 4 switches at rest	Closed Circuit
Front of Seat	3 and 8	Up	Closed Circuit
	3 and 6	Down	Closed Circuit
Rear of Seat	3 and 7	Up	Closed Circuit
	3 and 4	Down	Closed Circuit
Entire Seat	3 and 2	Rearward	Closed Circuit
	3 and 5	Forward	Closed Circuit

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Lamp or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Entire Seat	3 and 6	Down	Closed Circuit
	3 and 4	Down	Closed Circuit
	3 and 8	Up	Closed Circuit
	3 and 7	Up	Closed Circuit

REVISED

TERMINALS


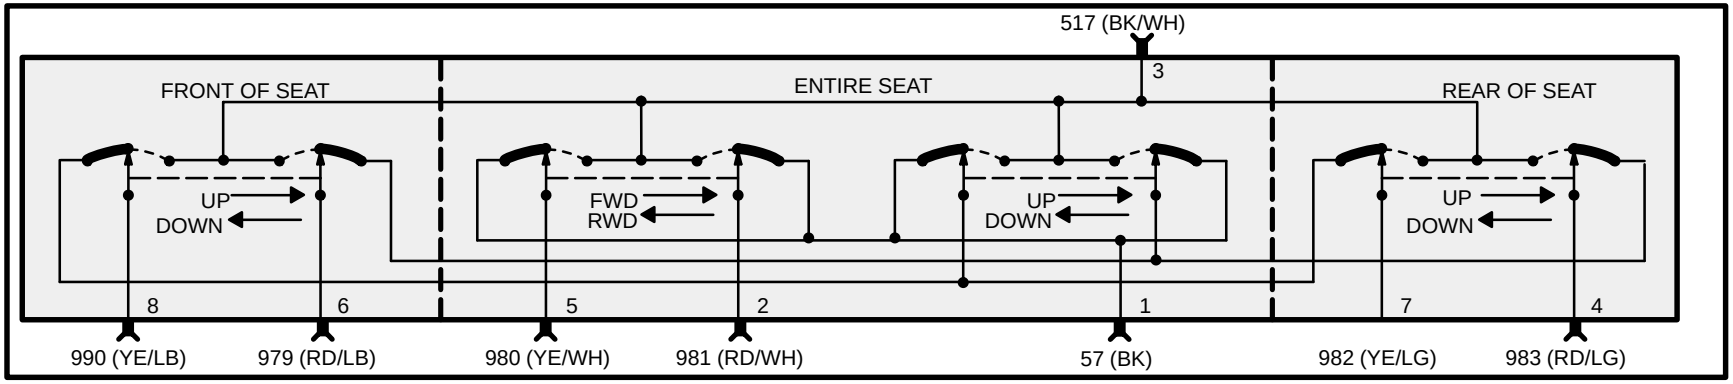
SCHEMATIC