## Door lock switch, driver side (14028)

### Schematic

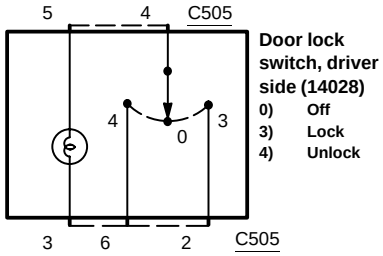


### Terminals

**C505**




F08074

### Component testing procedure

| Circuit to test | Connect self–powered test light or ohm-meter to terminals | Move switch to these positions | A good switch will indicate |
|---|---|---|---|
| **Lock Switch Circuit** | 4 and 2 | Lock | Closed circuit |
| | | Unlock | Open circuit |
| | | Off | |
| **Unlock Switch Circuit** | 4 and 6 | Lock | Open circuit |
| | | Unlock | Closed circuit |
| | | Off | Open circuit |