149-1 COMPONENT TESTING: INTRODUCTION

INTRODUCTION

Component testing procedures are provided to determine whether or not a component operates properly.

Testing information for each component includes a schematic with component terminal locations and step-by-step test procedures. Component terminals are identified by:

1. the circuit number of the wires that connect to that terminal,
2. the wire insulation color, and
3. letters or numbers that may be marked on the component.

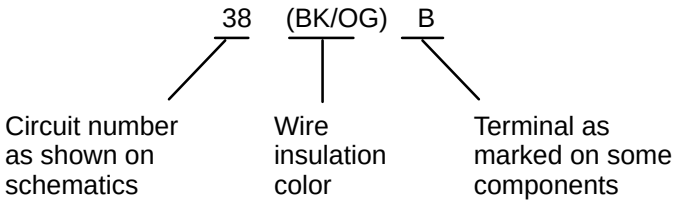

The component connector MUST BE REMOVED before testing. To test a single circuit within the component, select that circuit under the column TO TEST. If you wish to test the complete component, perform all tests.

Connect the tester to the terminals shown in the second column and operate the component as shown in the third column.

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Headlamp Circuit	7 and 8	**OFF** **PARK** **HEAD**	Open Circuit Open Circuit Closed Circuit
Park Lamp Circuit	7 and 3	**OFF** **PARK** **HEAD**	Open Circuit Closed Circuit Closed Circuit
Interior Lamp Circuit	7 and 6	Interior lamp switch in off position Interior lamp switch in on position	Open Circuit Closed Circuit
Panel Lamp Dimmer Up Circuit	2 and 4	Nothing pressed Press up on dimmer switch	Open Circuit Closed Circuit
Panel Lamp Dimmer Down Circuit	2 and 1	Nothing pressed Press down on dimmer switch	Open Circuit Closed Circuit