Power window switches -16

Schematic

Power window switches

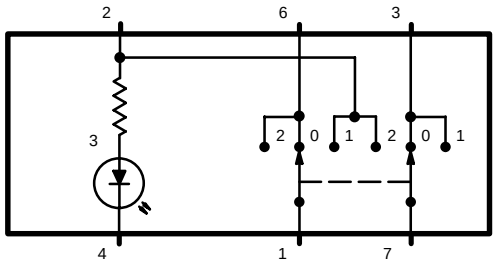

N297
Window operating switch, passenger side front
0) Off
1) Up
2) Down
3) Illumination

N298
Window operating switch, left rear
0) Off
1) Up
2) Down
3) Illumination

N299
Window operating switch, right rear
0) Off
1) Up
2) Down
3) Illumination

Terminal locations

C489
N297

C490
N298

C491
N299

F07054



Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Window regulator circuit	7 and 3	Off	Closed circuit
		Up	Closed circuit
		Down	Open circuit
	7 and 2	Off	Open circuit
		Up	Open circuit
		Down	Closed circuit
	1 and 2	Off	Open circuit
		Up	Closed circuit
		Down	Open circuit
	1 and 6	Off	Closed circuit
		Up	Open circuit
		Down	Closed circuit