C310a

14A005

A208
Restraints control
module (14B321)

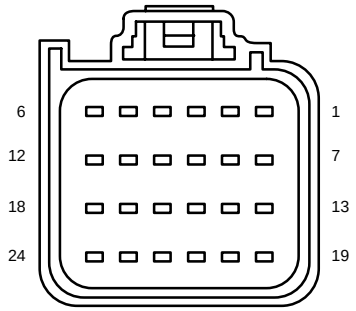

F24023

Pin	Circuit	Circuit function
1	614 (GY/OG)	Driver air bag, feed, monitor
2	615 (GY/WH)	Driver air bag, return
3	607 (LB/OG)	Passenger air bag, feed, monitor
4	616 (PK/BK)	Passenger air bag, return
5	1516 (YE/WH)	Driver air bag, feed, monitor
6	1517 (RD/OG)	Driver air bag, return
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	70 (LB/WH)	ISO Bus
12	1044 (WH/YE)	Voltage supplied in Start and Run (overload protected)
13	1518 (RD/WH)	Passenger air bag, feed, monitor
14	1519 (LG/RD)	Passenger air bag, return
15	608 (BK/YE)	Air bag indicator, control
16	1203 (BK/LB)	Ground
17	_	not used
18	_	not used
19	–	not used
20	1203 (BK/LB)	Ground
21	–	not used
22	1083 (LB/BK)	Air bag, tone driver
23	–	not used
24	–	not used