Component Testing – Power window switch, driver – with front power windows

SCHEMATIC

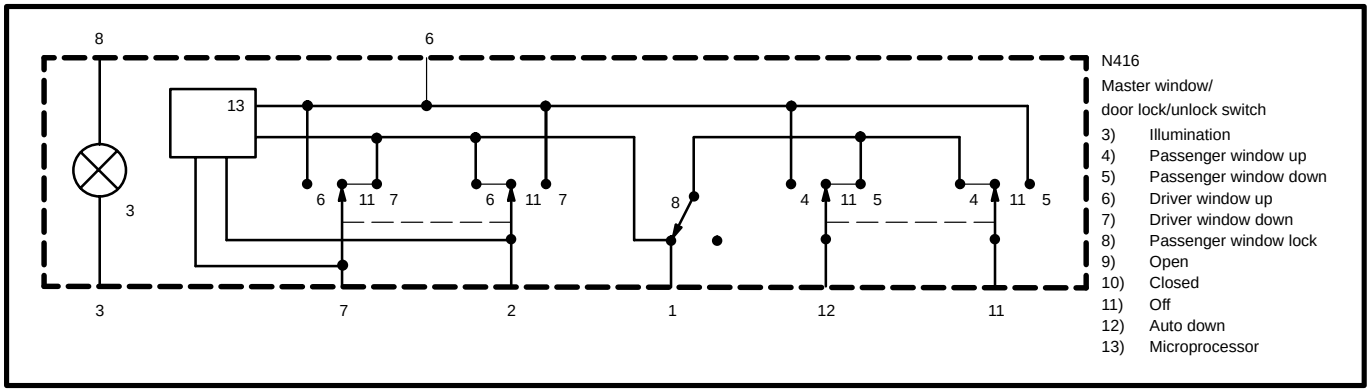

TERMINAL LOCATIONS

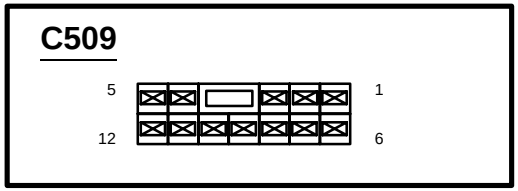

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Power and Ground	6 and 1	All switches, All positions	Open circuit
Left Front Window Circuit	6 and 7 1 and 2	Up	Closed Circuit
	6 and 2 1 and 7	Down	Closed Circuit
Right Front Window Circuit	6 and 12 1 and 11	Up	Closed Circuit
	6 and 11 1 and 12	Down	Closed Circuit