Component Testing – Ignition switch

SCHEMATIC

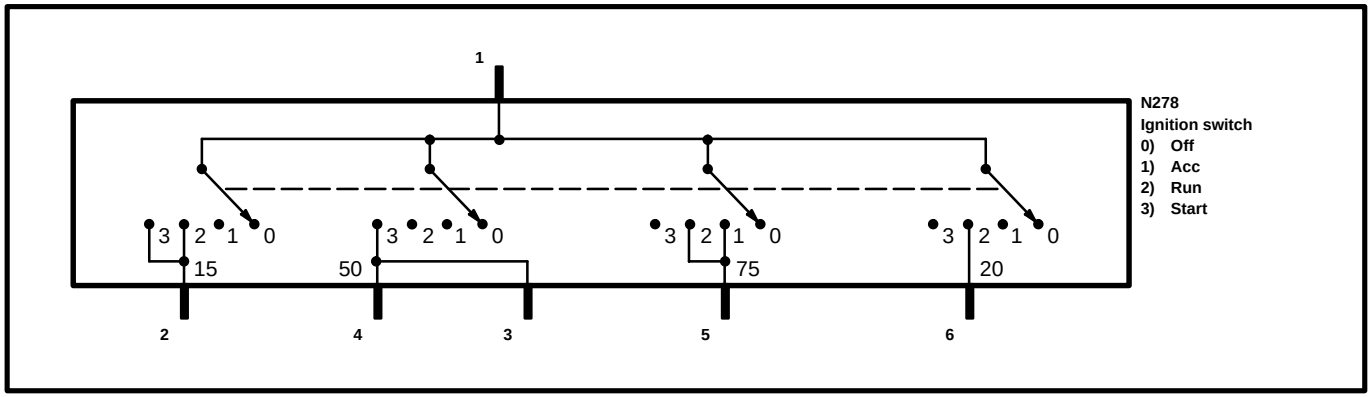

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Key to These Positions	A Good Switch Will Indicate
Start Power Circuit	1 and 4 1 and 3	Off	Open Circuit
		Acc	Open Circuit
		Run	Open Circuit
		Start	Closed Circuit
Run Power Circuit	1 and 6	Off	Open Circuit
		Acc	Open Circuit
		Run	Closed Circuit
		Start	Open Circuit
Acc, Run Power Circuit	1 and 5	Off	Open Circuit
		Acc	Closed Circuit
		Run	Closed Circuit
		Start	Open Circuit
Start, Run, Power Circuit	1 and 2	Off	Open Circuit
		Acc	Open Circuit
		Run	Closed Circuit
		Start	Closed Circuit
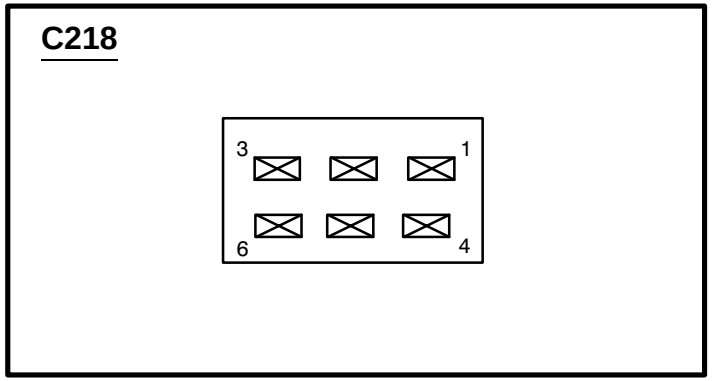
TERMINAL LOCATIONS