## Relay – Micro ISO

### Schematic

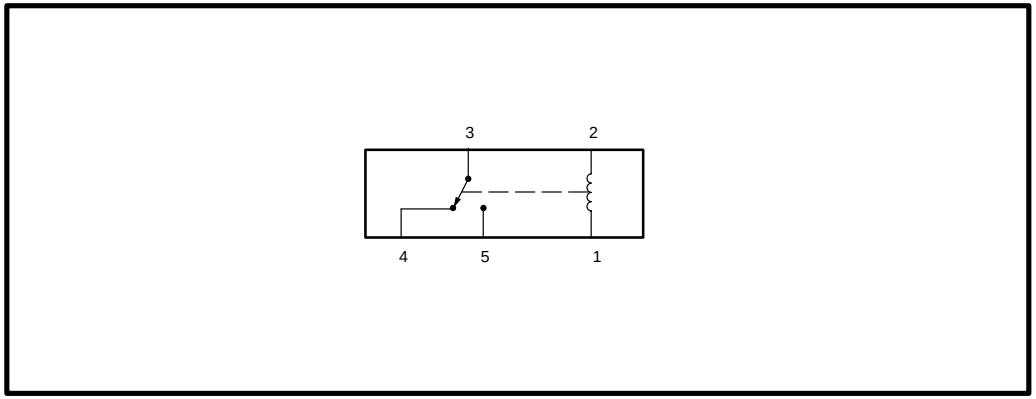


### Terminals

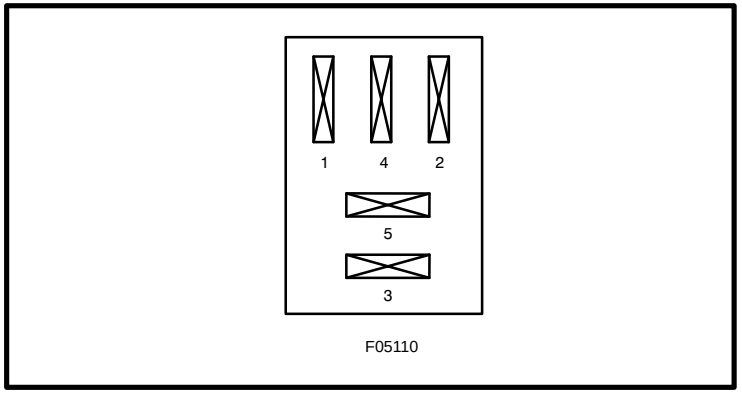


### Component testing procedure (no voltage applied)

| Circuit to test | Connect ohmmeter to terminals | A good relay will indicate |
|---|---|---|
| **Coil** | 1 and 2 | 100–150Ω |
| **Contact** | 3 and 4 | Closed circuit |
| | 3 and 5 | Open circuit |
| **Coil – Contact** | 1 and 3 | Open circuit |
| | 1 and 4 | Open circuit |
| | 1 and 5 | Open circuit |

### Component testing procedure (voltage applied)

Disconnect the ohmmeter; connect pins 2 and 3 to 12V DC power and pin 1 to ground. Measure voltage between pin 5 and pin 1. If the voltage is 12V, continue with the test. If not, replace the relay. Disconnect power from pin 2 and measure voltage between pin 4 and pin 1. If the voltage is 12V, the relay is okay. If not, replace the relay.